


Sharp/ NEC PN-LA752

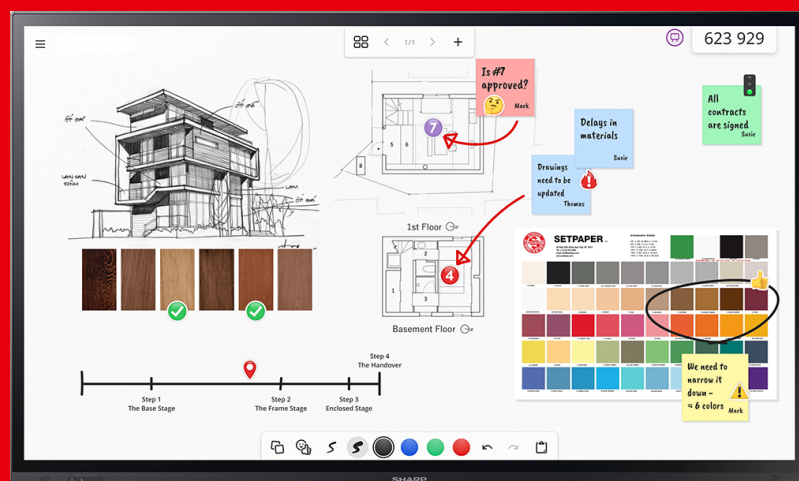

- Mest naturlige skriveoplevelse – InGlass™ M5 premium touch-system understøtter patenteret trykfølsomhed ved hjælp af passive penne samt Windows Ink og håndfladeafvisning.
- Valgfri Windows-baseret Intel SDM-slot-in-pc – giver ubegrænset alsidighed med kraftfuld integreret databehandling for hurtig og nem adgang til dine apps, der tilbyder et sikkert og låst miljø.
- Energieffektivitet – indbygget funktionalitet inklusive en omgivende lyssensor, registrering af menneskelig tilstedeværelse og øko-tilstande hjælper med at reducere strømforbruget.
- Sikker ved design – ikke-Android-plattformen med yderligere sikkerhedsfunktioner opfylder de højeste it-sikkerhedsstandarder.
- Forøg din produktivitet – drag fordel af en gratis etårig licens til FlatFrog Board for Rooms. FlatFrog Board whiteboard-software gør hybrid arbejde nemt og produktivt for alle

Specifikationer

DISPLAY MODULE DATA

Panel Technology	IPS with Direct LED backlights
Native Resolution (Pixels)	3840 x 2160
Diagonal Size (inches / cm)	75 / 189.3
Aspect Ratio	16:9
Backlight Technology	LED
Brightness (cd/m2)	450
Contrast Ratio	1200:1
Response Time (grey to grey avg) ms	8
Viewing Angle (H/V)0 CR >10	178 / 178
Colour Depth [bn]	1.073 (10bit)

TOUCH INTERFACE SPECIFICATION

Technology	InGlass™ M5
Number of Touch Points	20
Coating / Filter	Anti-glare coating
Screen Hardness (H)	≥ 8
Operating System Compatibility	Native Multi-Touch: Windows 7, Windows 8, Windows 10, Linux, Android; Default Mouse: Windows XP, Windows Vista, Mac OS X
Thickness [mm]	3
Haze Level [%]	4 ~ 8
Touch Method	Finger; Gloves; Stylus (≥ 2 mm)
Data Interface	USB-HID
Accuracy [mm]	< 1
Palm Rejection	Yes
Windows Ink	Yes

WEIGHTS AND MEASURES

Bezel Size (L/R) mm	4.8
Bezel Size (U/L) mm	4.8 / 32.3
Product Dimensions (W/H/D) mm	1,720.1 x 1,025.9 x 86.5
Product Weight Without Stand (Kg)	56.5

CONNECTIVITY (AUDIO/VIDEO) INPUT

HDMI	2
DisplayPort	1

CONNECTIVITY (CONTROL/SERIAL DATA)

RS232C IN	1
LAN Port	1
USB	4

KEY SPECIFICATIONS

Special Characteristics	DICOM Simulation; HDMI ARC; Powered USB Port (5 W)
24/7 Operation Certified	•
Local Dimming	•
Built in Speakers (W)	10 W + 10 W
Power Management	•

POWER SUPPLY AND OPERATING ENVIRONMENT

Operating Voltage(ACV) / Frequency(Hz)	100-240; 50 / 60
Power Consumption (W) (Operating MAX)	205 shipping
Operating Temperature (oC)	+5 to +35
Humidity (%)	20 to 80
Power Savings Mode [W]	< 0.5 (ECO Standby); < 2 (Networked Standby)

INSTALLATION

Landscape	•
Portrait	•
Horizontal	•
Mounting (VESA/Number of Points/Pitch mm)	4; 600 x 400

CONNECTIVITY (AUDIO/VIDEO) OUTPUT

DisplayPort	1
Audio/Headphone 3.5mm Jack	1

ACCESSORIES

Shipping Contents	1x 300 cm USB Cable; 2 x Passive Stylus; 2x AAA batteries; Blank Sticker; Bracket for Camera; Bracket for Mini PC; Cable Clamps; Display; Power Cable; Remote Control; Setup Manual
-------------------	---

