


NEC MultiSync P555

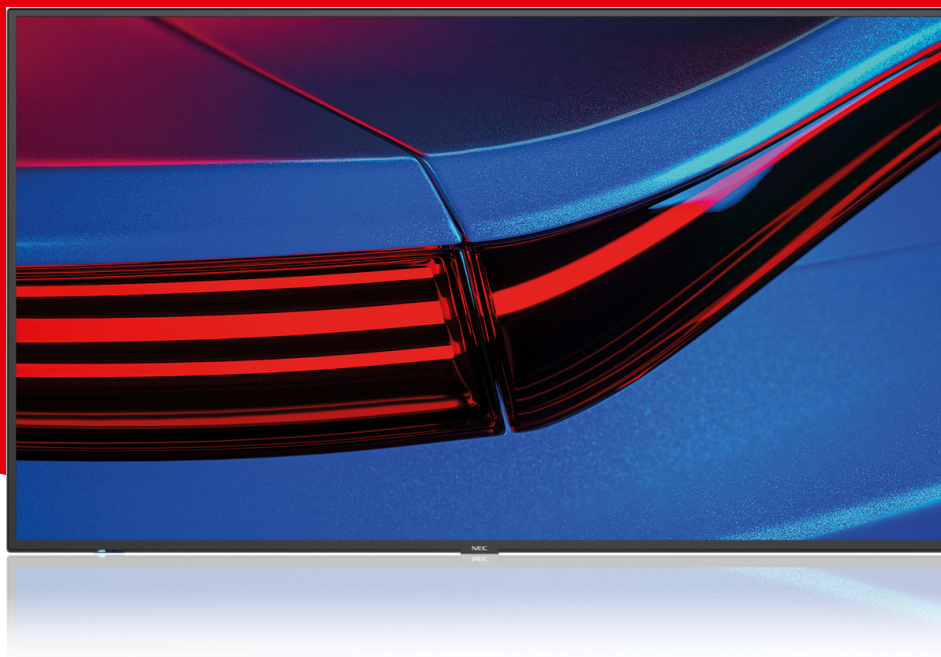

- Sikker fjernstyring – styr dine enheder sikkert på afstand ved hjælp af NEC NaviSet Administrator 2. Administrér vedligeholdelsesbehovene proaktivt, og spar tid og ressourcer.
- Sikker på offentlige steder – takket være en metalafdækning bagtil og intelligent varmestyring er den sikker at anvende på offentlige steder, hvor der er krav om brandbeskyttelse.
- Missionskritisk, klar til drift 24/7 – valget af industrielle komponenter og omhyggeligt design fokuseret på svære anvendelsesscenarier går hånd i hånd med en imponerende og uafbrudt brugeroplevelse.
- Uhindret læsbarhed – ingen genspejling fra vinduer eller andre lyskilder betyder, at skiltens indhold eller præsentationen i mødelokalet hele tiden er synlige.
- Forbedret visning af billeder - avancerede indstillinger af relevante, visuelle parametre giver mulighed for fuld kontrol af lysstyrke, farve, gamma og ensartethed via SpectraView Engine for præcise,

Specifikationer

DISPLAY MODULE DATA

Panel Technology	IPS with Edge LED backlights
Native Resolution (Pixels)	3840 x 2160
Diagonal Size (inches / cm)	55 / 138.8
Aspect Ratio	16:9
Brightness (cd/m2)	700
Contrast Ratio	≥ 8000:1
Response Time (grey to grey avg) ms	8
Viewing Angle (H/V) 0 CR >10	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Colour Depth [bn]	1.073 (10bit)
Haze Level [%]	28

POWER SUPPLY AND OPERATING ENVIRONMENT

Operating Voltage(ACV) / Frequency(Hz)	100-240 V AC; 50 / 60 Hz
Power Consumption (W) (Operating MAX)	110 shipping
Operating Temperature (oC)	0 to 40
Storage Temperature [°C]	-20 to 60
Humidity (%)	20 to 80
Storage Humidity [%]	10 to 90

INSTALLATION

Landscape	•
Portrait	•
Horizontal	•
Mounting (VESA/Number of Points/Pitch mm)	4; 300 x 300 (FDMI)

CONNECTIVITY (AUDIO/VIDEO) OUTPUT

HDMI	1
DisplayPort	1
Audio/Headphone 3.5mm Jack	1

ACCESSORIES

Shipping Content	2x AAA batteries; Display; HDMI Cable; Power Cable; Remote Control; Setup Manual
Remote Control Transmitter	Yes
Power Cord	Yes
Mounting Bracket	Optional
Tabletop Stand	Optional

KEY SPECIFICATIONS

Special Characteristics	DICOM Simulation; HDMI ARC; Powered USB Port (10 W); Removable Logo
Limited Manufacturer's Warranty (yrs.)	3
Power Management	•
Cabinet Colour	Black
Temperature Sensor	•
Brightness Sensor	•

WEIGHTS AND MEASURES

Bezel Size (L/R) mm	12.5
Bezel Size (U/L) mm	12 / 15.6
Product Dimensions (W/H/D) mm	1,239.6 x 713 x 61.1
Shipping Carton Dimensions (W/H/D) mm	1,430 x 920 x 250
Product Weight Without Stand (Kg)	27.6
Shipping Weight (Kg)	37.7

CONNECTIVITY (AUDIO/VIDEO) INPUT

HDMI	2
DisplayPort	2
Audio 3.5mm Jack	1

CONNECTIVITY (CONTROL/SERIAL DATA)

RS232C IN	1
LAN Port	1
USB	3

