


Digital Signage

NEC MULTISYNC M431-MPI4

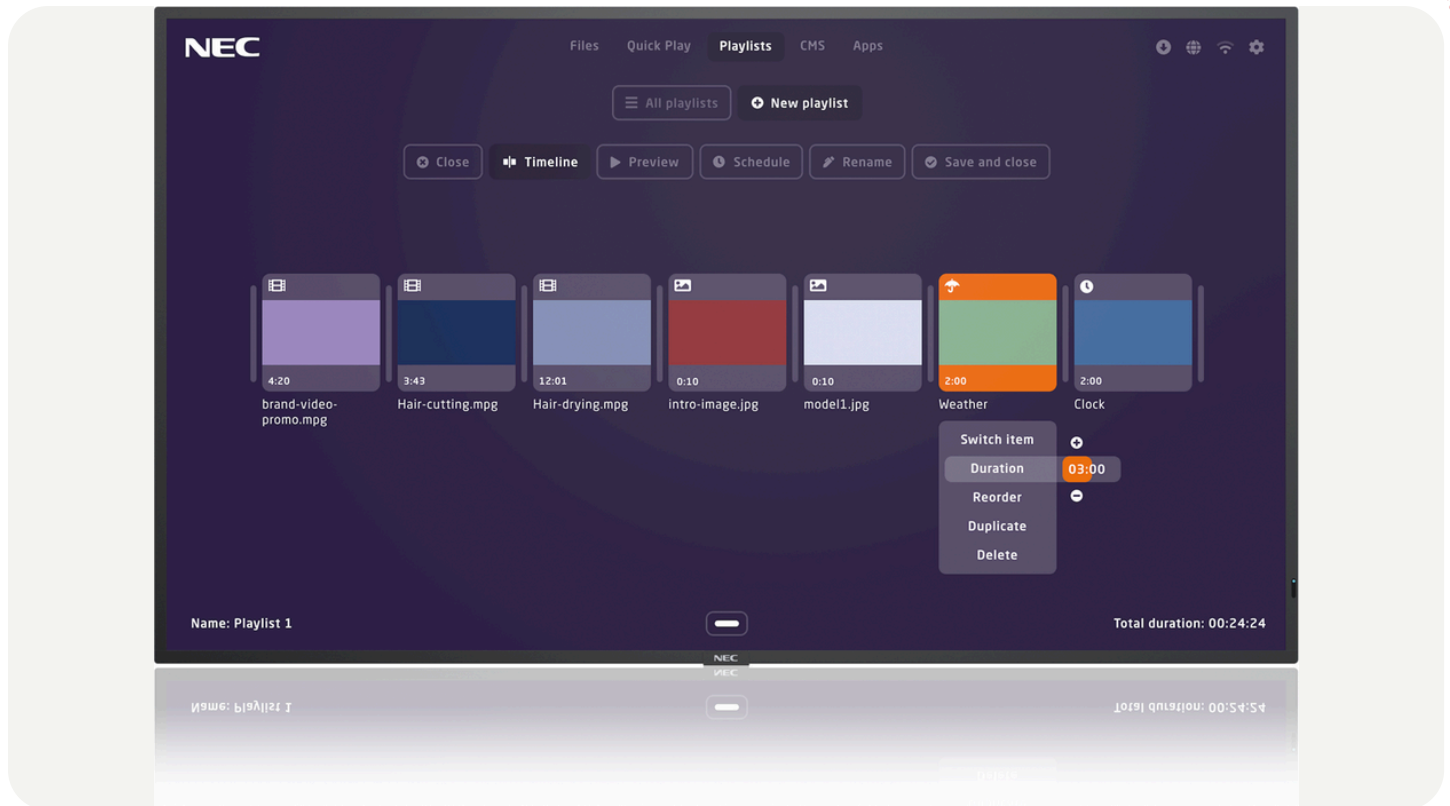

Let implementering af digital skiltning og tidstro information.

- Moderne og slankt design – robust, men elegant, mulighed for diskret integration i hvilken som helst anvendelse og alle miljøer.
- Intuitiv Plug & Play-løsning – selvom brugerne ikke har kendskab til anvendelsen af digital skiltning, kan de bidrage til at skabe imponerende skiltning for at opnå immersive, tidstro, visuelle oplevelser.
- Installér tredjeparters software – udvid NEC-medieafspillerfunktionen ved hjælp af ekstra apps, eller skift til dine foretrukne indholdsstyringssystemer (CMS, Content Management Systems) direkte fra N
- Få styr på det hele – der skal blot én grænseflade til for at styre NEC-medieafspilleren såvel som displayet direkte, via en webbaseret grænseflade eller NEC-displayets fjernstyring.
- Uhindret læsbarhed – ingen genspejling fra vinduer eller andre lyskilder betyder, at skiltens indhold eller præsentationen i mødelokalet hele tiden er synlige.

Specifikationer

Accessories

[AVSpecificationAccessories]	Remote Control Transmitter, Installation Set-Up Manual, Power Cord, HDMI Cable, Mounting Bracket, Tabletop Stand, Trolley Stand
Shipping Content	2 x AAA batteries, Display, HDMI Cable, Power Cable, Remote Control, Setup Manual, Pre-installed MPI4 MediaPlayer Kit
Panel Technology	IPS with Edge LED backlights
Native Resolution (Pixels)	3840 x 2160
Aspect Ratio	16:9
Brightness (cd/m2)	500
Contrast Ratio	8000:1
Response Time (grey to grey avg) ms	8
Viewing Angle [°]	178
Colour Depth [bn]	1076 (10bit)
Shipping Carton Dimensions (W/H/D) mm	1120
Shipping Carton Dimensions (W/H/D) mm	700
Shipping Carton Dimensions (W/H/D) mm	203
Product Weight Without Stand (Kg)	18
Shipping Weight (Kg)	23
DisplayPort	1
HDMI	2
Audio 3.5mm Jack	1
RS232C IN	1
LAN Port	1
USB	1
Bezel Size (L/R) mm	11
Bezel Size (U) mm	16
Haze Level [%]	28

Special Characteristics	Frame Comp, Powered USB Port (10 W), Removable Logo, Powered USB Port (15 W)
24/7 Operation Certified	True
Limited Manufacturer's Warranty (yrs.)	3
Local Dimming	True
Built in Speakers (W)	10 + 10
Computer Input - Plug and Play	True
Power Management	True
Equipment Space (Mounting)	True
Cabinet Colour	Black
Temperature Sensor	True
Brightness Sensor	True
IP Rating	True
Scheduler / Timer	True
Remote Management	True
Operating Voltage(ACV) / Frequency(Hz)	100-240
Operating Voltage(ACV) / Frequency(Hz)	50-60
Power Consumption (W) (Operating MAX)	80
Operating Temperature (oC)	0 - 40
Storage Temperature [°C]	-20 - 60
Storage Humidity [%]	10
Storage Humidity [%]	90
Landscape	True
Portrait	True
Mounting (VESA/Number of Points/Pitch mm)	300 x 300 (FDMI)
Mounting (VESA/Number of Points/Pitch mm)	4
Mounting Screw Specification (Size/Max Length)	M6
Diagonal Size (inches / cm)	43
Diagonal Size (inches / cm)	108
Operating Humidity (min) [%]	20
Operating Humidity (max) [%]	80
Energy Star	True

[AVSpecificationConnectivityOutputAudio35MmJack]1

