


Digital Signage Display

# Sharp/ NEC MultiSync M861 AirServer

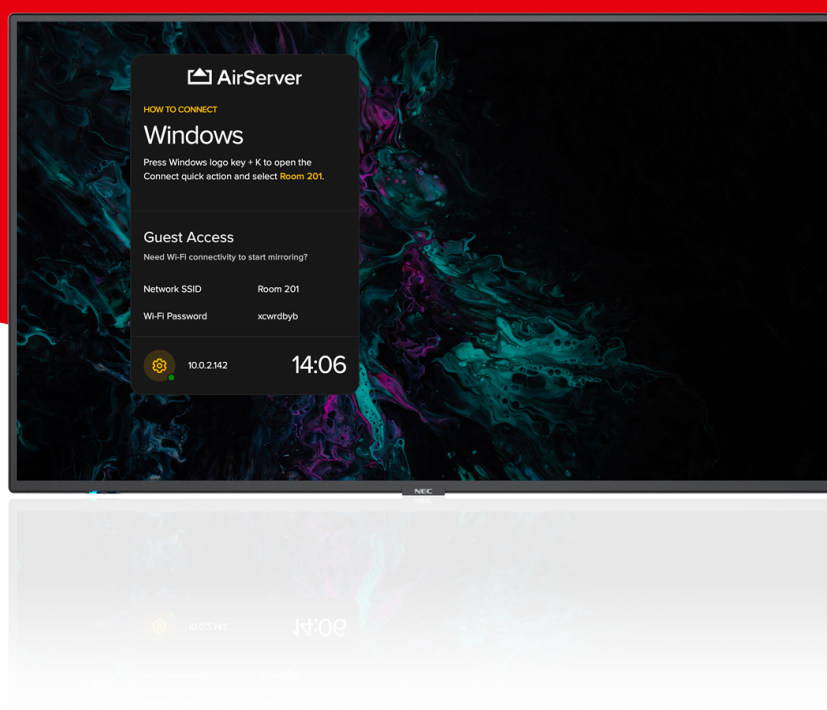

- Uhindret læsbarhed – ingen refleksioner fra vinduer eller andre lyskilder betyder ingen forstyrrelse af synligheden af skilteindhold eller mødelokalepræsentation.
- Sikker fjernstyring – fjernstyr dine enheder på en sikker måde ved hjælp af NEC NaviSet Administrator 2; administrere vedligeholdelseskrav proaktivt, hvilket sparer tid og ressourcer.
- Future Ready Connectivity – med flere industristandard digitale og analoge signalindgange til fleksibel integration i AV-infrastrukturer.
- Forbedret billedydelse – avancerede indstillinger af visuelle parametre giver fuld kontrol over lysstyrke, farve, gamma og ensartethed via SpectraView Engine for præcise, naturlige billeder.
- Missionskritisk 24/7 klar drift – valget af komponenter i industriel kvalitet og omhyggeligt design fokuseret på krævende brugsscenarier ledsager en imponerende og kontinuerlig seeroplevelse.

# Specifikationer

## DISPLAY MODULE DATA

Panel Technology	IPS with Direct LED backlights
Native Resolution (Pixels)	3840 x 2160
Diagonal Size (inches / cm)	86 / 217.4
Aspect Ratio	16:9
Backlight Technology	Direct LED
Brightness (cd/m2)	500
Contrast Ratio	≥ 8000:1
Response Time (grey to grey avg) ms	8
Viewing Angle (H/V)0 CR >10	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Colour Depth [bn]	1.073 (10bit)
Haze Level [%]	Pro (28)

## POWER SUPPLY AND OPERATING ENVIRONMENT

Operating Voltage(ACV) / Frequency(Hz)	100-240 V AC; 50 / 60 Hz
Power Consumption (W) (Operating MAX)	320 shipping
Operating Temperature (oC)	0 to 40
Storage Temperature [°C]	-20 to 60
Humidity (%)	20 to 80
Storage Humidity [%]	10 to 80

## INSTALLATION

Landscape	•
Portrait	•
Mounting (VESA/Number of Points/Pitch mm)	4; 600 x 400 (FDMI)

## CONNECTIVITY (AUDIO/VIDEO) OUTPUT

HDMI	1
DisplayPort	1
Audio/Headphone 3.5mm Jack	1

## AIRSERVER EMBEDDED SCREEN MIRRORING SOLUTION

Airplay	Code and password; extend macOS display; iOS, iPadOS and macOS; screen mirroring and content sharing
Google Cast	Android, Chrome OS and Google Chrome; prompt security; screen mirroring and cast from apps with DRM
Miracast	Android and Windows; extend Windows 10 desktop; Miracast over infrastructure; screen mirroring; touchback and pen support
Guest Connectivity	2.4 and 5 GHz channel selection; access control (device only, Internet only or Internet / LAN; Wi-Fi Hotspot; WPA2 security
Video Output	Up to Full HD (1920 x 1080) at 60 fps
No. of Connections	1
Networking	1 x Gigabit LAN; 802.11 ac / b / g / n Wi-Fi; 802.1X security; IPv6 addresses; Proxy
Automatic Updates	Provides new features and security enhancements

## KEY SPECIFICATIONS

Special Characteristics	DICOM Simulation; HDMI ARC; Powered USB Port (10 W); Removable Logo
24/7 Operation Certified	•
Limited Manufacturer's Warranty (yrs.)	3
Local Dimming	•
Built in Speakers (W)	10W + 10W
Power Management	•
Cabinet Colour	Black
Temperature Sensor	•
Brightness Sensor	•

## WEIGHTS AND MEASURES

Bezel Size (L/R) mm	14.3
Bezel Size (U/L) mm	14.3 / 14.8
Product Dimensions (W/H/D) mm	1,927.6 x 1,099.1 x 83.2
Shipping Carton Dimensions (W/H/D) mm	2,090 x 1,225 x 225
Product Weight Without Stand (Kg)	47
Shipping Weight (Kg)	65.1

## CONNECTIVITY (AUDIO/VIDEO) INPUT

HDMI	2
DisplayPort	2
Audio 3.5mm Jack	1

## CONNECTIVITY (CONTROL/SERIAL DATA)

RS232C IN	1
LAN Port	1
USB	3

## ACCESSORIES

Shipping Content	2x AAA batteries; Display; HDMI Cable; Power Cable; Remote Control; Setup Manual
Remote Control Transmitter	Yes
Power Cord	Yes
Mounting Bracket	Optional
Tabletop Stand	Optional
Battery	Yes

