


Interaktiv skærm

# Sharp/ NEC 75 inch Du-Co Room System

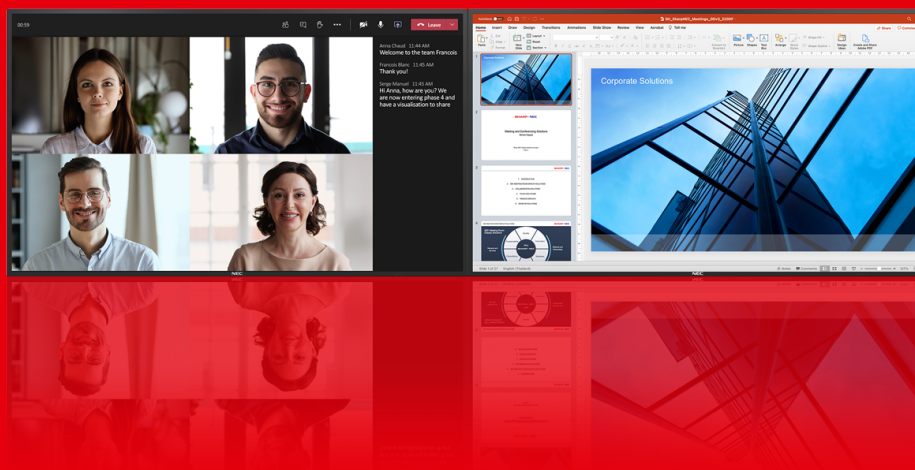

- Gå ikke på kompromis med designet – ved at kombinere en interaktiv og ikke-interaktiv skærm med det samme slanke og elegante design.
- NEC Open Modular Intelligence (OMI) slot-in-teknologi – vælg skalerbar computerkraft med Raspberry Pi Compute Module 4 eller Intel® Smart Display Modules (Intel® SDM) til skræddersyede løsninger.
- Bliv mere produktiv – få et års gratis licens til FlatFrog Board for Rooms! FlatFrog Board whiteboard-software gør hybrid arbejde nemt og lige produktivt for alle.
- Naturlig skriveoplevelse – Uanset om du bruger finger eller pen, giver InGlass™-berøringsteknologien sømløs interaktiv berøringsdeevne, inklusive Windows Ink og håndfladeafvisning.
- Missionskritisk 24/7 klar drift – valget af komponenter i industriel kvalitet og omhyggeligt design fokuseret på krævende brugsscenarier ledsager en imponerende og kontinuerlig seeroplevelse.

# Specifikationer

## DISPLAY MODULE DATA

Panel Technology	ADS with Direct LED backlights
Native Resolution (Pixels)	3840 x 2160
Diagonal Size (inches / cm)	75 / 189.3
Aspect Ratio	16:9
Backlight Technology	LED
Brightness (cd/m2)	500
Contrast Ratio	> 8000:1
Response Time (grey to grey avg) ms	8
Viewing Angle (H/V)0 CR >10	178 / 178
Colour Depth [bn]	1,076 (10bit)

## TOUCH INTERFACE SPECIFICATION

Technology	InGlass™
Number of Touch Points	20
Coating / Filter	Anti-glare coating
Screen Hardness (H)	7
Operating System Compatibility	Native Multi-Touch: Windows 7, Windows 8, Windows 10, Linux, Android; Default Mouse: Windows XP, Windows Vista, Mac OS X
Thickness [mm]	3
Haze Level [%]	Pro(25)
Reflection Rate [%]	89 (+ / - 1 %)
Touch Method	Finger; Gloves; Stylus (≥ 2 mm)
Data Interface	USB-HID
Accuracy [mm]	< 1
Palm Rejection	Yes
Windows Ink	Yes

## WEIGHTS AND MEASURES

Bezel Size (L/R) mm	21.9
Bezel Size (U/L) mm	21.9
Product Dimensions (W/H/D) mm	1,724.6 x 1,003.0 x 93.4
Product Weight Without Stand (Kg)	62 / 62.2

## CONNECTIVITY (AUDIO/VIDEO) INPUT

HDMI	4
DisplayPort	3
Audio 3.5mm Jack	1

## CONNECTIVITY (CONTROL/SERIAL DATA)

RS232C IN	1
LAN Port	1
USB	3

## KEY SPECIFICATIONS

Special Characteristics	DICOM Simulation; HDMI ARC; Powered USB Port (10 W)
Operating Time	24 / 7
24/7 Operation Certified	•
Built in Speakers (W)	10 W + 10 W
Power Management	•

## POWER SUPPLY AND OPERATING ENVIRONMENT

Operating Voltage(ACV) / Frequency(Hz)	100-240; 50 / 60
Power Consumption (W) (Operating MAX)	205
Operating Temperature (oC)	+0 to +35
Humidity (%)	20 to 80
Power Savings Mode [W]	< 0.5 (ECO Standby); < 2 (Networked Standby)

## INSTALLATION

Landscape	•
Mounting (VESA/Number of Points/Pitch mm)	4; 600 x 400

## CONNECTIVITY (AUDIO/VIDEO) OUTPUT

HDMI	1
DisplayPort	1
Audio/Headphone 3.5mm Jack	1

## ACCESSORIES

Shipping Contents	2x AAA batteries; Display; HDMI Cable; Power Cable; Remote Control; Setup Manual / 2x AAA batteries; Display; HDMI Cable; Power Cable; Remote Control; Setup Manual; USB Cable
-------------------	--

