


# NEC MultiSync ME431-MPi4

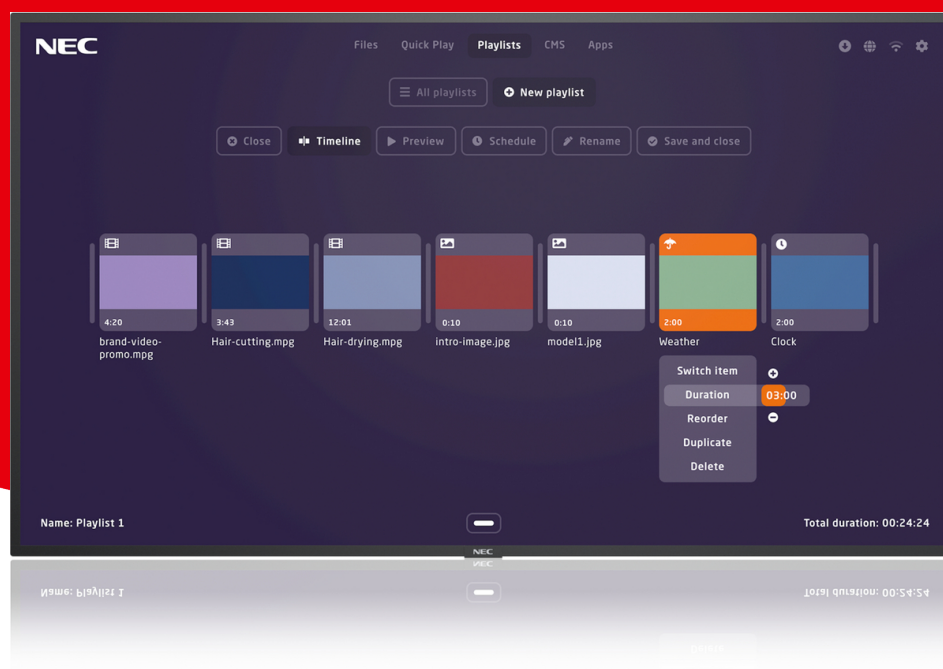

- Moderne og slankt design – robust, men elegant, mulighed for diskret integration i hvilken som helst anvendelse og alle miljøer.
- Intuitiv Plug & Play-løsning – selvom brugerne ikke har kendskab til anvendelsen af digital skiltning, kan de bidrage til at skabe imponerende skiltning for at opnå immersive, tidstro, visuelle oplevelser
- Installér tredjeparters software – udvid NEC-medieafspillerfunktionen ved hjælp af ekstra apps, eller skift til dine foretrukne indholdsstyringssystemer (CMS, Content Management Systems) direkte fra N
- Få styr på det hele – der skal blot én grænseflade til for at styre NEC-medieafspilleren såvel som displayet direkte, via en webbaseret grænseflade eller NEC-displays fjernstyring.
- Uhindret læsbarhed – ingen genspejling fra vinduer eller andre lyskilder betyder, at skiltens indhold eller præsentationen i mødelokalet hele tiden er synlige.

# Specifikationer

## DISPLAY MODULE DATA

|                                     |                                                             |
|-------------------------------------|-------------------------------------------------------------|
| Panel Technology                    | IPS with Direct LED backlights                              |
| Native Resolution (Pixels)          | 3840 x 2160                                                 |
| Diagonal Size (inches / cm)         | 43 / 108                                                    |
| Aspect Ratio                        | 16:9                                                        |
| Brightness (cd/m2)                  | 400                                                         |
| Contrast Ratio                      | ≥ 8000:1                                                    |
| Response Time (grey to grey avg) ms | 8                                                           |
| Viewing Angle (H/V) @ CR >10        | 178 horizontal / 178 vertical (typ. at contrast ratio 10:1) |
| Colour Depth [bn]                   | 1.073 (8bit + FRC)                                          |
| Haze Level [%]                      | 1                                                           |

## POWER SUPPLY AND OPERATING ENVIRONMENT

|                                        |                          |
|----------------------------------------|--------------------------|
| Operating Voltage(ACV) / Frequency(Hz) | 100-240 V AC; 50 / 60 Hz |
| Power Consumption (W) (Operating MAX)  | 80 shipping              |
| Operating Temperature (°C)             | 0 to 40                  |
| Storage Temperature [°C]               | -20 to 60                |
| Humidity (%)                           | 20 to 80                 |
| Storage Humidity [%]                   | 10 to 90                 |

## INSTALLATION

|                                           |               |
|-------------------------------------------|---------------|
| Landscape                                 | •             |
| Portrait                                  | •             |
| Mounting (VESA/Number of Points/Pitch mm) | 4 / 200 x 200 |

## CONNECTIVITY (AUDIO/VIDEO) OUTPUT

|                            |   |
|----------------------------|---|
| Audio/Headphone 3.5mm Jack | 1 |
|----------------------------|---|

## ACCESSORIES

|                            |                                                                                                                      |
|----------------------------|----------------------------------------------------------------------------------------------------------------------|
| Shipping Content           | 2x AAA batteries; Display; HDMI Cable; Power Cable; Pre-installed MPi4 MediaPlayer Kit; Remote Control; Setup Manual |
| Remote Control Transmitter | Yes                                                                                                                  |
| Power Cord                 | Yes                                                                                                                  |
| Mounting Bracket           | Optional                                                                                                             |
| Tabletop Stand             | Optional                                                                                                             |

## KEY SPECIFICATIONS

|                                        |                                                                     |
|----------------------------------------|---------------------------------------------------------------------|
| Special Characteristics                | DICOM Simulation; HDMI ARC; Powered USB Port (10 W); Removable Logo |
| Limited Manufacturer's Warranty (yrs.) | 3                                                                   |
| Local Dimming                          | •                                                                   |
| Built in Speakers (W)                  | 10W + 10W                                                           |
| Computer Input - Plug and Play         | •                                                                   |
| Power Management                       | •                                                                   |
| Cabinet Colour                         | Black                                                               |
| Temperature Sensor                     | •                                                                   |

## WEIGHTS AND MEASURES

|                                       |                    |
|---------------------------------------|--------------------|
| Bezel Size (L/R) mm                   | 13.9               |
| Bezel Size (U/L) mm                   | 13.9               |
| Product Dimensions (W/H/D) mm         | 973 x 561.2 x 62.6 |
| Shipping Carton Dimensions (W/H/D) mm | 1,120 x 700 x 203  |
| Product Weight Without Stand (Kg)     | 13.9               |
| Shipping Weight (Kg)                  | 19.6               |

## CONNECTIVITY (AUDIO/VIDEO) INPUT

|                  |   |
|------------------|---|
| HDMI             | 2 |
| DisplayPort      | 1 |
| Audio 3.5mm Jack | 1 |

## CONNECTIVITY (CONTROL/SERIAL DATA)

|           |   |
|-----------|---|
| RS232C IN | 1 |
| LAN Port  | 1 |
| USB       | 1 |

