


Digital Signage

SHARP MULTISYNC® UN553S LCD 55" VIDEO WALL DISPLAY

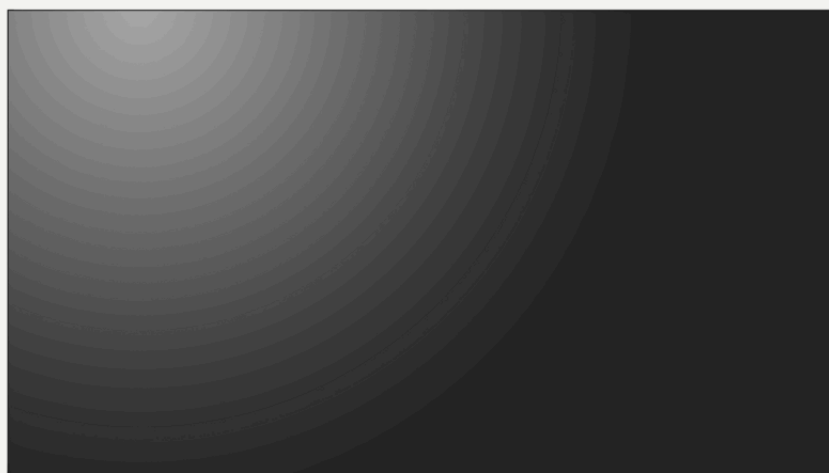

Skalér den visuelle effekt med den modulære Sharp MultiSync® UN serie, som er udviklet med ultratynde rammer til at skabe højopløste videovægge med minimale samlinger.

- Nem installation – enkel opsætning med Auto TileMatrix og forudindstillet kalibrering. Færdige billedtilstande sparer tid til forskellige foruddefinerede anvendelsesområder.
- Forbedret billedydeevne – Avancerede billedindstillinger, der giver fuld kontrol over lysstyrke, farve, gamma og ensartethed via SpectraView Engine, sikrer præcise og naturlige billeder.
- Naturtro og ensartet farvegengivelse – oplev virkelighedstro farverepræsentation med IPS-panelteknologi. Billedkvaliteten forbliver ensartet både i liggende og stående orientering samt ved brede betragningsvinkler, når forbipasserende ser på skærmen.
- Sikker driftssikkerhed og lang levetid – metalchassiset bidrager til naturlig varmeafledning, mens det unikke varmebehandlingsystem giver brugerne mulighed for at overvåge og styre interne temperaturer og beskytter komponenterne mod varmeophobning.
- Omkostningseffektiv enhedshåndtering – reducér arbejdsindsatsen ved at administrere alle tilsluttede Sharp- og ældre enheder fra én central platform ved hjælp af softwaren NaViSet Administrator 2.

Specifikationer

Bezel Size (L/R) mm	1
Bezel Size (U/L) mm	1
Response Time (grey to grey avg) ms	8
Colour Versions	Black Back Cabinet, Black Front Bezel
Plug & Play	VESA DDC/CI
Safety & Ergonomics	TÜV S, BSMI, EMC Class B, FCC, PSB, RoHS, TÜV GS, UL/C-UL or CSA, ISO 9241-307 (pixel failure class 2), CE, EAC, SASO, VCCI, RCM, REACH
Limited Manufacturer's Warranty (yrs.)	Optional 4th to 5th year warranty extension, [additional-services-available], 3 years warranty incl. backlight
Portrait	True
Landscape	True
Landscape	True
Portrait	True
Mounting (VESA/Number of Points/Pitch mm)	400 x 400 (FDMI)
Mounting (VESA/Number of Points/Pitch mm)	4
Mounting Screw Specification (Size/Max Length)	M6
Panel Technology	IPS with Direct LED backlights
Native Resolution (Pixels)	1920 x 1080
Aspect Ratio	16:9
Brightness (cd/m2)	700
Contrast Ratio	3500:1
Viewing Angle [°]	178
Response Time (typ.) [ms]	8
Energy Efficiency	Human sensor, LED backlight technology, Carbon Footprint Meter / Carbon Savings Meter, Energy consumption: 146 kWh/1000 h, Energy efficiency class: G
Digital	DisplayPort, DisplayPort out, HDMI
Analog	VGA
Output Control	LAN 100Mbit
[AVSpecificationLandscapeDimensionsWidthMm]	1211
[AVSpecificationLandscapeDimensionsHeightMm]	681
[AVSpecificationLandscapeDimensionsDepthMm]	103
Power Consumption on-mode (IEC62087:2012)	180 (shipping)
Power Supply	100-240 V
Product Weight Without Stand (Kg)	28
Haze Level [%]	Pro 25

Special Characteristics	Frame Comp, USB Media Player, User input priority definition, User readable log function, NaViSet Administrator 2, PLink Support, TileMatrix, DICOM Simulation, Auto tiling function, Automatic Alarm E-Mails, HTTP Server, Image flip
24/7 Operation Certified	True
Built in Speakers (W)	15 + 15
Temperature Sensor	True
Operating Time	24/7
[AVSpecificationSupportedImageFormats]	Max. resolution 5000 x 5000, PNG (interlace, alpha channel), JPG (baseline, progressive, RGB, CMYK), Max. resolution 4000 x 4000

Operating Voltage(ACV) / Frequency(Hz)	100-240
Operating Voltage(ACV) / Frequency(Hz)	50-60
Via AC Adapter	True
Operating Voltage(DCV)	100-240
Operating Temperature (oC)	0 - 40
Storage Temperature [°C]	-20 - 60
Storage Humidity [%]	10
Storage Humidity [%]	90
[AVSpecificationPowerSavingModeW]	< 2 (Networked Standby)
[AVSpecificationBattery]	< 0.5 (ECO Standby)

Accessories

[AVSpecificationAccessories]	[calibration-kit], [feet], [wall-mount], [speaker], [remote-control-kit]
------------------------------	--

Shipping Content	Power Cable, LAN Cable (RJ45), HDMI Cable, DisplayPort Cable, Display
------------------	---

Supported Resolution	1280 x 768, 1024 x 768 , 1280 x 1024, 1600 x 1200, 1920 x 1080, 640 x 480, 800 x 600, 3840 x 2160, 1360 x 768
----------------------	---

Diagonal Size (inches / cm)	55
Diagonal Size (inches / cm)	139
Colour Gamuts	72% NTSC

Bezel Size (L/R) mm	1
Bezel Size (U) mm	1
Bezel Size (L) mm	1

Horizontal Frequency [kHz]	26 - 134
Vertical Frequency [Hz]	23 - 86

Operating Humidity (min) [%]	20
Operating Humidity (max) [%]	80

[AVSpecificationWeightKg]	28
---------------------------	----

