


Digital Signage

# SHARP/ NEC MULTISYNC M861

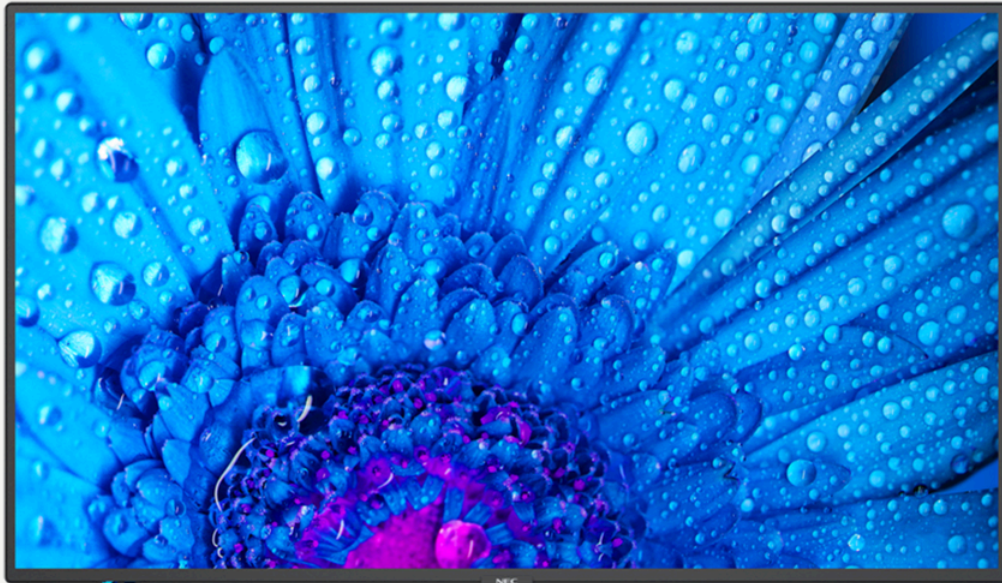

## Intuitiv, professionel levering af indhold.

- Uhindret læsbarhed – ingen genspejling fra vinduer eller andre lyskilder betyder, at skiltens indhold eller præsentationen i mødelokalet hele tiden er synlige.
- Forbedret visning af billeder - avancerede indstillinger af relevante, visuelle parametre giver mulighed for fuld kontrol af lysstyrke, farve, gamma og ensartethed via SpectraView Engine for præcise,
- Missionskritisk, klar til drift 24/7 – valget af industrielle komponenter og omhyggeligt design fokuseret på svære anvendelsesscenerier går hånd i hånd med en imponerende og uafbrudt brugeroplevelse.
- Fremtidssikrede forbindelsesmuligheder – udstyret med flere digitale og analoge signalindgange, der opfylder industristandarderne, for at sikre fleksibel integration i AV-infrastrukturer.
- Sikker fjernstyring – styr dine enheder sikkert på afstand ved hjælp af NEC NaviSet Administrator 2. Administrér vedligeholdelsesbehovene proaktivt, og spar tid og ressourcer.

# Specifikationer

## Accessories

[AVSpecificationAccessories]	Remote Control Transmitter, Installation Set-Up Manual, Power Cord, Brightness Sensor, HDMI Cable, Mounting Bracket, Tabletop Stand, Trolley Stand
Shipping Content	2 x AAA batteries, Display, HDMI Cable, Power Cable, Remote Control, Setup Manual

Panel Technology	IPS with Direct LED backlights
Native Resolution (Pixels)	3840 x 2160
Aspect Ratio	16:9
Backlight Technology	Direct LED
Brightness (cd/m2)	500
Contrast Ratio	8000:1
Response Time (grey to grey avg) ms	8
Viewing Angle [°]	178
Colour Depth [bn]	1073 (10bit)

Shipping Carton Dimensions (W/H/D) mm	2090
Shipping Carton Dimensions (W/H/D) mm	1225
Shipping Carton Dimensions (W/H/D) mm	225
Product Weight Without Stand (Kg)	47
Shipping Weight (Kg)	65

DisplayPort	3
HDMI	4
Audio 3.5mm Jack	1

RS232C IN	1
LAN Port	1
USB	3

Diagonal Size (inches / cm)	86
Diagonal Size (inches / cm)	217

Operating Humidity (min) [%]	20
Operating Humidity (max) [%]	80

Special Characteristics	Frame Comp, Powered USB Port (10 W), Removable Logo, Powered USB Port (15 W)
24/7 Operation Certified	True
Limited Manufacturer's Warranty (yrs.)	3
Local Dimming	True
Built in Speakers (W)	10 + 10
Power Management	True
Equipment Space (Mounting)	True
Temperature Sensor	True
Brightness Sensor	True
Picture in Picture Mode	True
Scheduler / Timer	True
Remote Management	True
SNMP	True

Operating Voltage(ACV) / Frequency(Hz)	100-240
Operating Voltage(ACV) / Frequency(Hz)	50-60
Power Consumption (W) (Operating MAX)	320
Operating Temperature (oC)	0 - 40
Storage Temperature [°C]	-20 - 60
Storage Humidity [%]	10
Storage Humidity [%]	80

Landscape	True
Portrait	True
Mounting (VESA/Number of Points/Pitch mm)	600 x 400 (FDMI)
Mounting (VESA/Number of Points/Pitch mm)	4
Mounting Screw Specification (Size/Max Length)	M8

DisplayPort	1
HDMI	1
[AVSpecificationConnectivityOutputAudio35MmJack]1	

Bezel Size (L/R) mm	14
Bezel Size (U) mm	14
Bezel Size (L) mm	15

Energy Star	True
-------------	------

Haze Level [%]	Pro 28
----------------	--------

