


Videovæg

NEC MULTISYNC UN552V

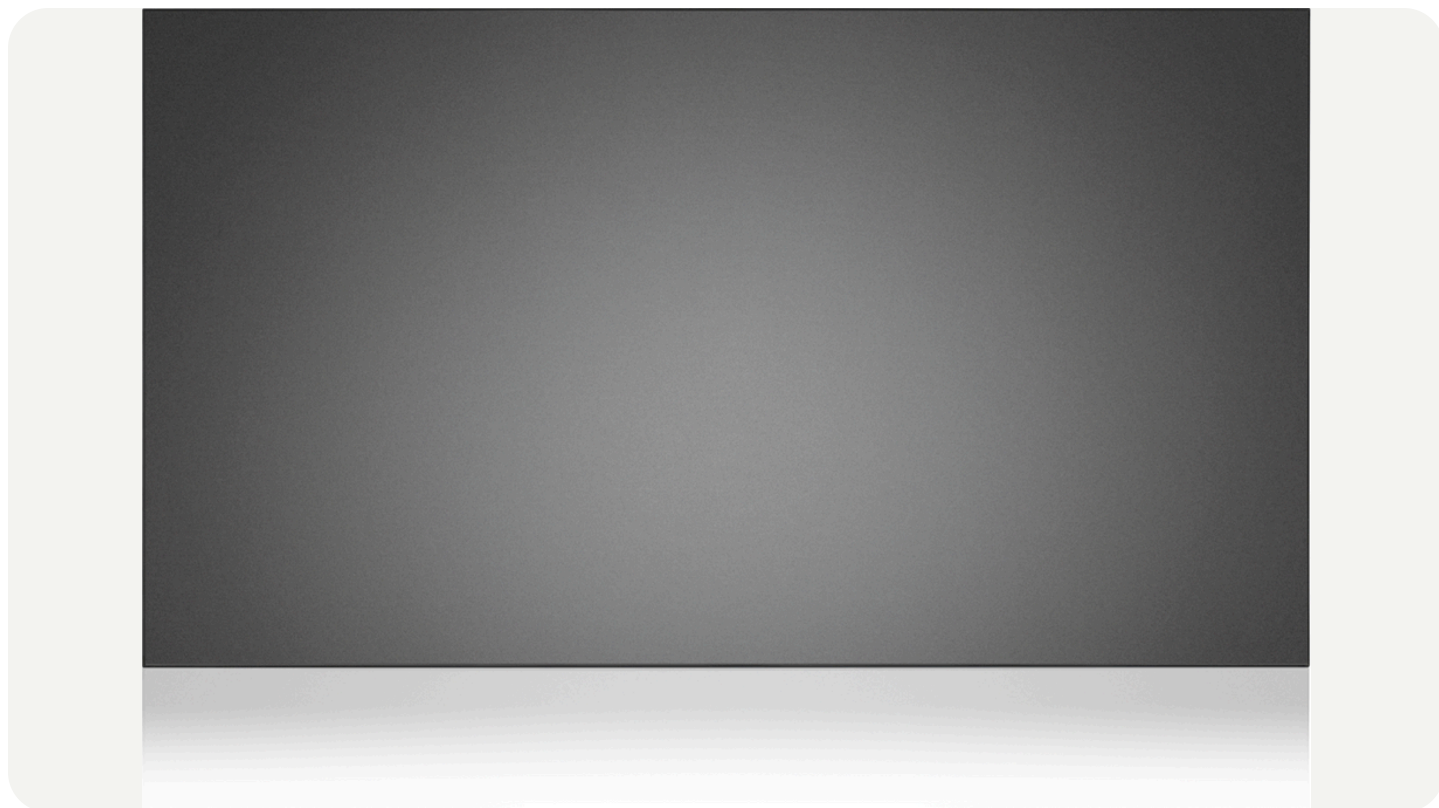

Videovægge, som du kan regne med.

- Nem installation – opsæt dit vægdisplay uden besvær med Auto TileMatrix og kalibreringer ud af boksen. Spar tid ved hjælp af billedforindstillinger, der er klar til brug og beregnet til forhåndsdefinerede billeder.
- Forbedret visning af billeder - avancerede indstillinger af relevante, visuelle parametre giver mulighed for fuld kontrol af lysstyrke, farve, gamma og ensartethed via SpectraView Engine for præcise, realistiske billeder.
- Virkelighedstro og ensartet farve - du kan forvente en farvegengivelse, der minder om det virkelige liv, med IPS-panelteknologien. Takket være S-IPS-panelet opretholdes perfekt synlighed ved ekstreme vinkler.
- Videovægge med sikker pålidelighed og lang levetid – et enestående NEC-varmestyringssystem gør det muligt for brugeren at overvåge og styre varmen inde i displayet.
- Omkostningsbesparende enhedsstyring – spar indsats, mens du administrerer alle tilsluttede NEC-enheder fra en central placering ved at bruge NaViSet Administrator 2-softwareværktøjet.

Specifikationer

Accessories

[AVSpecificationAccessories]	Remote Control Transmitter, Installation Set-Up Manual, Power Cord, HDMI Cable, DisplayPort Cable, Mounting Bracket, Tabletop Stand
Shipping Content	Display, DisplayPort Cable, HDMI Cable, LAN Cable (RJ45), Power Cable

Panel Technology	S-IPS with Direct LED backlights
Native Resolution (Pixels)	1920 x 1080
Aspect Ratio	16:9
Backlight Technology	Direct LED
Brightness (cd/m2)	500
Contrast Ratio	1700:1
Response Time (grey to grey) ms	8
Pixel Pitch (mm H/V)	0,63
Viewing Angle [°]	178
Active Screen Area (H/V) mm	1209.63 x 680.34

Power Consumption (W) (Operating MAX)	315
Operating Temperature (oC)	0 - 40
Storage Temperature [°C]	-20 - 60
Storage Humidity [%]	10
Storage Humidity [%]	90

DisplayPort	1
HDMI	1
[AVSpecificationConnectivityOutputAudio35MmJack]	1

Colour Versions	Black Front Bezel, Black Back Cabinet
-----------------	---------------------------------------

Operating Humidity (min) [%]	20
Operating Humidity (max) [%]	80

Product Weight Without Stand (Kg)	26
-----------------------------------	----

Special Characteristics	Auto tiling function, Automatic Alarm E-Mails, DICOM Simulation, Frame Comp, HTTP Server, Image flip, Intelligent Wireless Data (based on NFC), NaViSet Administrator 2, PJLink Support, USB Media Player, User input priority definition, User readable log function, Ambient Light Sensor
24/7 Operation Certified	True
Limited Manufacturer's Warranty (yrs.)	3
Computer Input - Plug and Play	True
Option Slot Interface	True
Equipment Space (Mounting)	True
Cabinet Colour	Black
Residual Image Reduction Feature	True
Composite	1
DisplayPort	2
DVI-D	1
HDMI	2
Audio 3.5mm Jack	2
VGA	1
Landscape	True
Portrait	True
Mounting (VESA/Number of Points/Pitch mm)	400 x 400 (FDMI)
Mounting (VESA/Number of Points/Pitch mm)	4
Mounting Screw Specification (Size/Max Length)	M6
RS232C IN	1
LAN Port	2
USB	5
Diagonal Size (inches / cm)	55
Diagonal Size (inches / cm)	139
Energy Star	True
Haze Level [%]	28

