


NEC MultiSync M551 PCAP

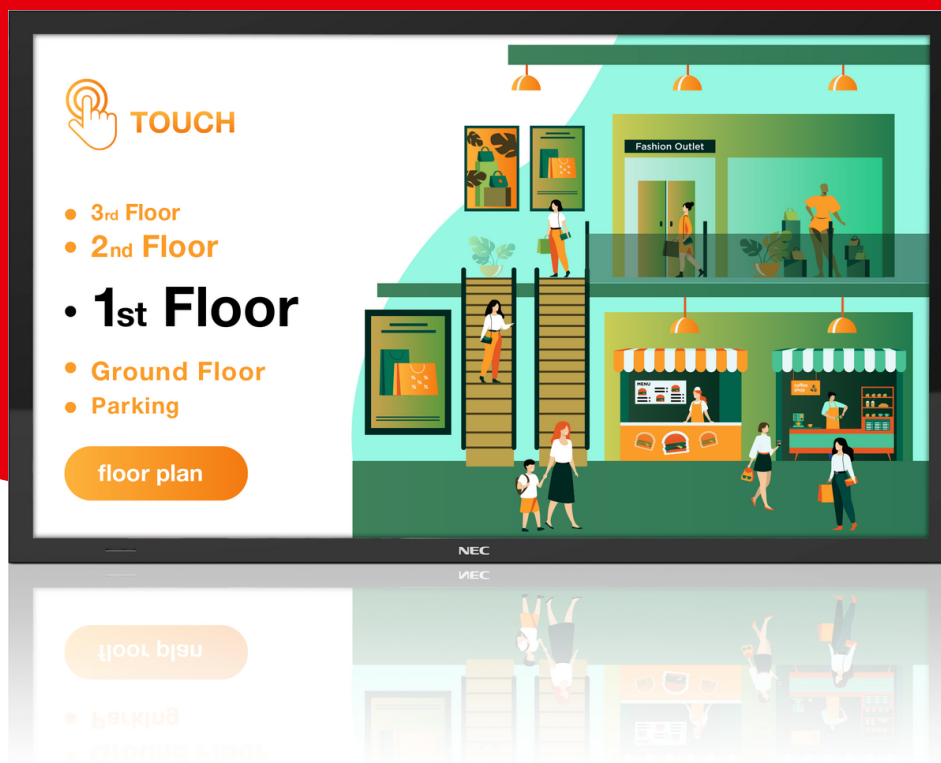

- Moderne og rengøringsvenligt design – kant til kant med mulighed for diskret integration i hvilken som helst anvendelse og alle miljøer.
- Uhindret læsbarhed – ingen genspejling fra vinduer eller andre lyskilder betyder, at skiltens indhold eller præsentationen i mødelokalet hele tiden er synlige.
- Sikker fjernstyring – styr dine enheder sikkert på afstand ved hjælp af NEC NaviSet Administrator 2. Administrér vedligeholdelsesbehovene proaktivt, og spar tid og ressourcer.
- Enestående touch-præstationer – med op til 20 touch-punkter byder PCAP-teknologien på fremragende touch-respons og anvendelse af penne.
- Missionskritisk, klar til drift 24/7 – valget af industrielle komponenter og omhyggeligt design fokuseret på svære anvendelsesscenarier går hånd i hånd med en imponerende og uafbrudt brugeroplevelse.

Specifikationer

DISPLAY MODULE DATA

Panel Technology	IPS with Edge LED backlights
Native Resolution (Pixels)	3840 x 2160
Diagonal Size (inches / cm)	55 / 138.8
Aspect Ratio	16:9
Backlight Technology	LED
Brightness (cd/m2)	500
Contrast Ratio	> 8000:1
Response Time (grey to grey avg) ms	8
Viewing Angle (H/V) 0 CR >10	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Colour Depth [bn]	1,076 (10bit)

TOUCH INTERFACE SPECIFICATION

Technology	PCAP
Number of Touch Points	20
Coating / Filter	Anti-glare
Screen Hardness (H)	6
Operating System Compatibility	Android; Linux; Raspberry Pi; Windows
Light Transmission [%]	85 (+ / - 5 %)
Haze Level [%]	5 ~ 10
Touch Method	Conductive Passive Stylus; Finger
Data Interface	USB-HID
Palm Rejection	No
Windows Ink	No

WEIGHTS AND MEASURES

Bezel Size (L/R) mm	18.95
Bezel Size (U/L) mm	20
Product Dimensions (W/H/D) mm	1,275.8 x 746.8 x 67.8
Product Weight Without Stand (Kg)	36.4

CONNECTIVITY (AUDIO/VIDEO) INPUT

HDMI	2
DisplayPort	1
Audio 3.5mm Jack	1

CONNECTIVITY (CONTROL/SERIAL DATA)

RS232C IN	1
LAN Port	1
USB	1

KEY SPECIFICATIONS

Special Characteristics	HDMI ARC; Powered USB Port (10 W)
24/7 Operation Certified	•
Built in Speakers (W)	10 + 10
Power Management	•

POWER SUPPLY AND OPERATING ENVIRONMENT

Power Consumption (W) (Operating MAX)	110 shipping
Operating Temperature (oC)	0 to 35
Humidity (%)	20-80

INSTALLATION

Landscape	•
Portrait	•
Horizontal	•
Mounting (VESA/Number of Points/Pitch mm)	300 x 300 (FDMI); 4 holes

CONNECTIVITY (AUDIO/VIDEO) OUTPUT

Audio/Headphone 3.5mm Jack	1
----------------------------	---

ACCESSORIES

Shipping Contents	2x AAA batteries; Display; HDMI Cable; Power Cable; Remote Control; Setup Manual; USB cable
-------------------	---

