


NEC MultiSync ME501-MPi4

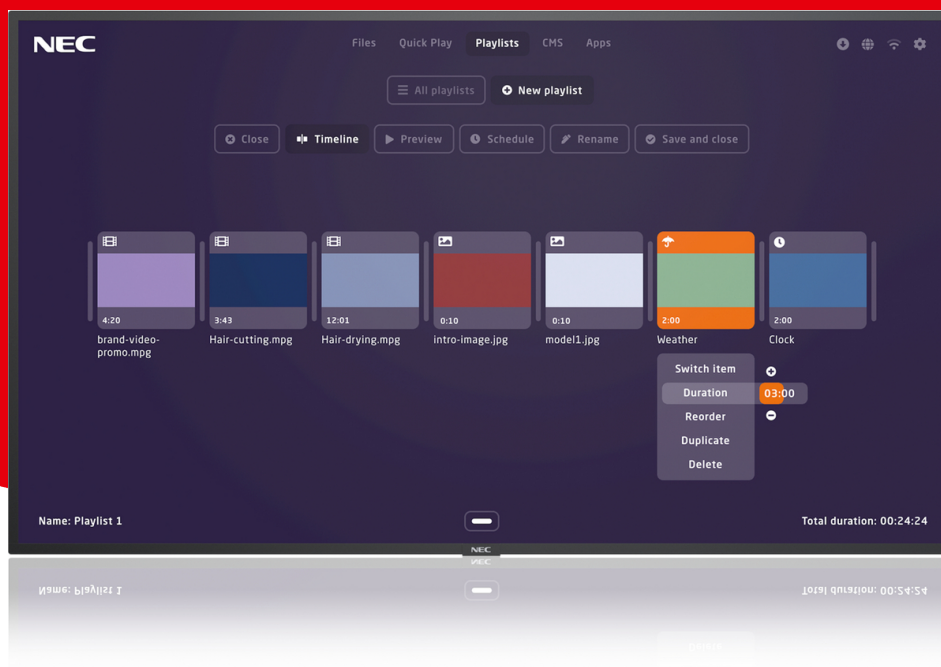

- Moderne og slankt design – robust, men elegant, mulighed for diskret integration i hvilken som helst anvendelse og alle miljøer.
- Intuitiv Plug & Play-løsning – selvom brugerne ikke har kendskab til anvendelsen af digital skiltning, kan de bidrage til at skabe imponerende skiltning for at opnå immersive, tidstro, visuelle oplevelser.
- Installér tredjeparters software – udvid NEC-medieafspillerfunktionen ved hjælp af ekstra apps, eller skift til dine foretrukne indholdsstyringssystemer (CMS, Content Management Systems) direkte fra N
- Få styr på det hele – der skal blot én grænseflade til for at styre NEC-medieafspilleren såvel som displayet direkte, via en webbaseret grænseflade eller NEC-displayets fjernstyring.
- Uhindret læsbarhed – ingen genspejling fra vinduer eller andre lyskilder betyder, at skiltens indhold eller præsentationen i mødelokalet hele tiden er synlige.

Specifikationer

DISPLAY MODULE DATA

| | |
|-------------------------------------|-------------------------------------------------------------|
| Panel Technology | VA with Direct LED backlights |
| Native Resolution (Pixels) | 3840 x 2160 |
| Diagonal Size (inches / cm) | 50 / 125.7 |
| Aspect Ratio | 16:9 |
| Brightness (cd/m2) | 400 |
| Contrast Ratio | ≥ 8000:1 |
| Response Time (grey to grey avg) ms | 8 |
| Viewing Angle (H/V)0 CR >10 | 178 horizontal / 178 vertical (typ. at contrast ratio 10:1) |
| Colour Depth [bn] | 1.073 (8bit + FRC) |
| Haze Level [%] | 1 |

POWER SUPPLY AND OPERATING ENVIRONMENT

| | |
|----------------------------------------|--------------------------|
| Operating Voltage(ACV) / Frequency(Hz) | 100-240 V AC; 50 / 60 Hz |
| Power Consumption (W) (Operating MAX) | 85 shipping |
| Operating Temperature (oC) | 0 to 40 |
| Storage Temperature [°C] | -20 to 60 |
| Humidity (%) | 20 to 80 |
| Storage Humidity [%] | 10 to 90 |

INSTALLATION

| | |
|-------------------------------------------|----------------------|
| Landscape | • |
| Portrait | • |
| Mounting (VESA/Number of Points/Pitch mm) | 4 / 400 x 400 (FDMI) |

CONNECTIVITY (AUDIO/VIDEO) OUTPUT

| | |
|----------------------------|---|
| Audio/Headphone 3.5mm Jack | 1 |
|----------------------------|---|

ACCESSORIES

| | |
|----------------------------|----------------------------------------------------------------------------------|
| Shipping Content | 2x AAA batteries; Display; HDMI Cable; Power Cable; Remote Control; Setup Manual |
| Remote Control Transmitter | Yes |
| Power Cord | Yes |
| Mounting Bracket | Optional |
| Tabletop Stand | Optional |

KEY SPECIFICATIONS

| | |
|----------------------------------------|---------------------------------------------------------------------|
| Special Characteristics | DICOM Simulation; HDMI ARC; Powered USB Port (10 W); Removable Logo |
| Limited Manufacturer's Warranty (yrs.) | 3 |
| Local Dimming | • |
| Built in Speakers (W) | 10W + 10W |
| Computer Input - Plug and Play | • |
| Power Management | • |
| Cabinet Colour | Black |
| Temperature Sensor | • |

WEIGHTS AND MEASURES

| | |
|---------------------------------------|----------------------|
| Bezel Size (L/R) mm | 14.9 |
| Bezel Size (U/L) mm | 14.9 |
| Product Dimensions (W/H/D) mm | 1,128.4 x 649 x 62.6 |
| Shipping Carton Dimensions (W/H/D) mm | 1,298 x 860 x 224 |
| Product Weight Without Stand (Kg) | 17.3 |
| Shipping Weight (Kg) | 24.1 |

CONNECTIVITY (AUDIO/VIDEO) INPUT

| | |
|------------------|---|
| HDMI | 2 |
| DisplayPort | 1 |
| Audio 3.5mm Jack | 1 |

CONNECTIVITY (CONTROL/SERIAL DATA)

| | |
|-----------|---|
| RS232C IN | 1 |
| LAN Port | 1 |
| USB | 1 |

