


Digital Signage

SHARP/ NEC MULTISYNC M751 AIRSERVER

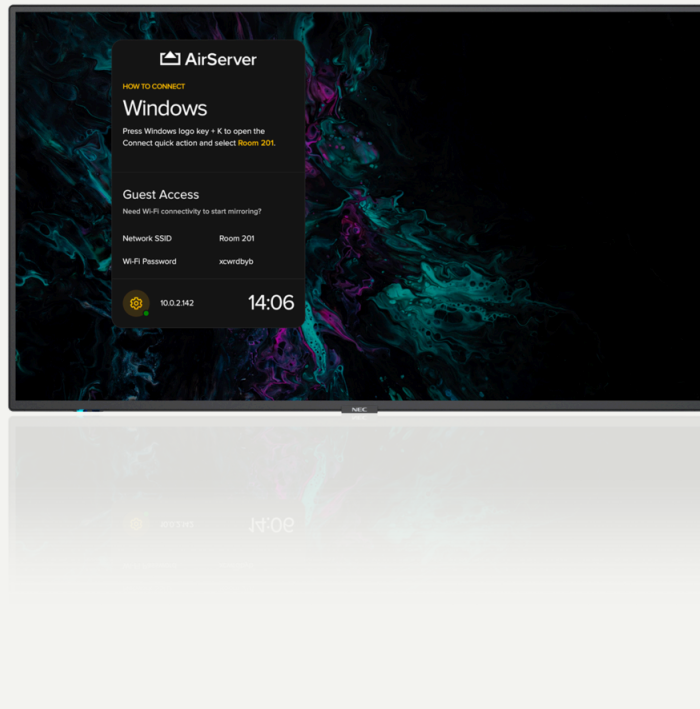

MultiSync AirServer-modellerne er perfekte til mødelokaler og mødelokaler og giver en slank kombination af intuitiv skærmdeling med professionel skærmt teknologi, hvilket understøtter ubesværet samarbejde.

- Uhindret læsbarhed – ingen refleksioner fra vinduer eller andre lyskilder betyder ingen forstyrrelse af synligheden af skilteindhold eller mødelokalepræsentation.
- Forbedret billedydelse – avancerede indstillinger af visuelle parametre giver fuld kontrol over lysstyrke, farve, gamma og ensartethed via SpectraView Engine for præcise, naturlige billeder.
- Sikker fjernstyring – fjernstyr dine enheder på en sikker måde ved hjælp af NEC NaviSet Administrator 2; administrere vedligeholdelseskrav proaktivt, hvilket sparer tid og ressourcer.
- Missionskritisk 24/7 klar drift – valget af komponenter i industriel kvalitet og omhyggeligt design fokuseret på krævende brugsscenarier ledsager en imponerende og kontinuerlig seeroplevelse.
- Future Ready Connectivity – med flere industristandard digitale og analoge signalindgange til fleksibel integration i AV-infrastrukturer.

Specifikationer

Accessories

[AVSpecificationAccessories]	Remote Control Transmitter, Installation Set-Up Manual, Power Cord, HDMI Cable, Mounting Bracket, Tabletop Stand, Trolley Stand, Battery
Shipping Content	2 x AAA batteries, Display, HDMI Cable, Power Cable, Remote Control, Setup Manual

Special Characteristics	Frame Comp, Powered USB Port (10 W), Removable Logo, Powered USB Port (15 W)
24/7 Operation Certified	True
Limited Manufacturer's Warranty (yrs.)	3
Local Dimming	True
Built in Speakers (W)	10 + 10
Power Management	True
Cabinet Colour	Black
Temperature Sensor	True
Brightness Sensor	True
Picture in Picture Mode	True
Picture by Picture Mode	True
Scheduler / Timer	True
Remote Management	True
Gain Control	True
E-Mail Notification	True
SNMP	True

Operating Voltage(ACV) / Frequency(Hz)	100-240
Operating Voltage(ACV) / Frequency(Hz)	50-60
Power Consumption (W) (Operating MAX)	205
Operating Temperature (oC)	0 - 40
Storage Temperature [°C]	-20 - 60
Storage Humidity [%]	10
Storage Humidity [%]	80

Landscape	True
Portrait	True
Mounting (VESA/Number of Points/Pitch mm)	600 x 400 (FDMI)
Mounting (VESA/Number of Points/Pitch mm)	4
Mounting Screw Specification (Size/Max Length)	M8

DisplayPort	1
HDMI	1
[AVSpecificationConnectivityOutputAudio35MmJack]	1

Bezel Size (L/R) mm	14
Bezel Size (U) mm	14
Bezel Size (L) mm	15

Operating Humidity (min) [%]	20
Operating Humidity (max) [%]	80

Haze Level [%]	Pro 25
----------------	--------

AirServer Embedded Screen Mirroring Solution

Miracast	Android and Windows, extend Windows 10 desktop, Miracast over infrastructure, screen mirroring, touchback and pen support
Airplay	Code and password, extend macOS display, iOS, iPadOS and macOS, screen mirroring and content sharing
Google Cast	Android, Chrome OS and Google Chrome, prompt security, screen mirroring and cast from apps with DRM
Guest Connectivity	2.4 and 5 GHz channel selection, access control (device only, Internet only or Internet/LAN), Wi-Fi Hotspot, WPA2 security
Video Output	Up to Full HD (1920 x 1080) at 60 fps
No. of Connections	1
Networking	1 x Gigabit LAN, 802.11 ac/b/g/n Wi-Fi, 802.1X security, IPv6 addresses, Proxy
Automatic Updates	Provides new features and security enhancements

Panel Technology	IPS with Direct LED backlights
Native Resolution (Pixels)	3840 x 2160
Aspect Ratio	16:9
Backlight Technology	Direct LED
Brightness (cd/m2)	500
Contrast Ratio	8000:1
Response Time (grey to grey avg) ms	8
Viewing Angle [°]	178
Colour Depth [bn]	1073 (10bit)

Shipping Carton Dimensions (W/H/D) mm	1830
Shipping Carton Dimensions (W/H/D) mm	1070
Shipping Carton Dimensions (W/H/D) mm	225
Product Weight Without Stand (Kg)	38
Shipping Weight (Kg)	52

DisplayPort	2
HDMI	2
Audio 3.5mm Jack	1

RS232C IN	1
LAN Port	1
USB	3

Diagonal Size (inches / cm)	75
Diagonal Size (inches / cm)	189

Energy Star	True
-------------	------

