


NEC MultiSync M651-MPi4

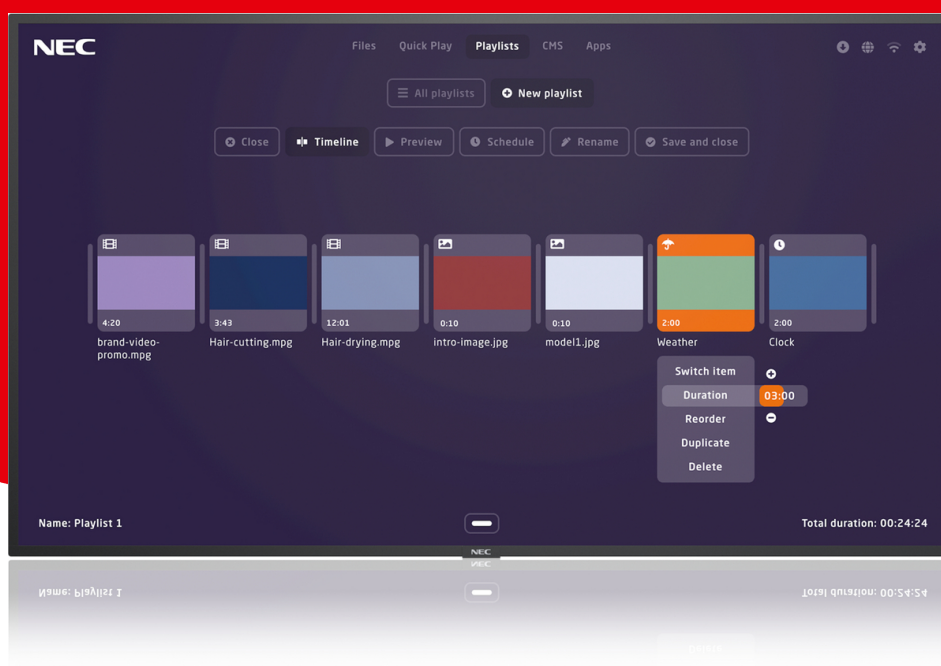

- Moderne og slankt design – robust, men elegant, mulighed for diskret integration i hvilken som helst anvendelse og alle miljøer.
- Intuitiv Plug & Play-løsning – selvom brugerne ikke har kendskab til anvendelsen af digital skiltning, kan de bidrage til at skabe imponerende skiltning for at opnå immersive, tidstro, visuelle oplevelse
- Installér tredjeparters software – udvid NEC-mediaefspillerfunktionen ved hjælp af ekstra apps, eller skift til dine foretrukne indholdsstyringssystemer (CMS, Content Management Systems) direkte fra N
- Få styr på det hele – der skal blot én grænseflade til for at styre NEC-mediaefspilleren såvel som displayet direkte, via en webbaseret grænseflade eller NEC-displayets fjernstyring.
- Uhindret læsbarhed – ingen genspejling fra vinduer eller andre lyskilder betyder, at skiltens indhold eller præsentationen i mødelokalet hele tiden er synlige.

Specifikationer

DISPLAY MODULE DATA

Panel Technology	IPS with Direct LED backlights
Native Resolution (Pixels)	3840 x 2160
Diagonal Size (inches / cm)	65 / 163.9
Aspect Ratio	16:9
Brightness (cd/m2)	500
Contrast Ratio	≥ 8000:1
Response Time (grey to grey avg) ms	8
Viewing Angle (H/V) @ CR >10	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Colour Depth [bn]	1.076 (10bit)
Haze Level [%]	28

POWER SUPPLY AND OPERATING ENVIRONMENT

Operating Voltage(ACV) / Frequency(Hz)	100-240 V AC; 50 / 60 Hz
Power Consumption (W) (Operating MAX)	120 shipping
Operating Temperature (oC)	0 to 40
Storage Temperature [°C]	-20 to 60
Humidity (%)	20 to 80
Storage Humidity [%]	10 to 90

INSTALLATION

Landscape	•
Portrait	•
Mounting (VESA/Number of Points/Pitch mm)	4 / 400 x 400

CONNECTIVITY (AUDIO/VIDEO) OUTPUT

Audio/Headphone 3.5mm Jack	1
----------------------------	---

ACCESSORIES

Shipping Content	2x AAA batteries; Display; HDMI Cable; Power Cable; Pre-installed MPi4 MediaPlayer Kit; Remote Control; Setup Manual
Remote Control Transmitter	Yes
Power Cord	Yes
Mounting Bracket	Optional
Tabletop Stand	Optional

KEY SPECIFICATIONS

Special Characteristics	DICOM Simulation; HDMI ARC; Powered USB Port (10 W); Removable Logo
Limited Manufacturer's Warranty (yrs.)	3
Local Dimming	•
Built in Speakers (W)	10W + 10W
Computer Input - Plug and Play	•
Power Management	•
Cabinet Colour	Black
Temperature Sensor	•
Brightness Sensor	•

WEIGHTS AND MEASURES

Bezel Size (L/R) mm	12.5
Bezel Size (U/L) mm	12 / 15.6
Product Dimensions (W/H/D) mm	1,458.4 x 836.2 x 62.6
Shipping Carton Dimensions (W/H/D) mm	1,736 x 1,033 x 280
Product Weight Without Stand (Kg)	37.1
Shipping Weight (Kg)	49.31

CONNECTIVITY (AUDIO/VIDEO) INPUT

HDMI	2
DisplayPort	1
Audio 3.5mm Jack	1

CONNECTIVITY (CONTROL/SERIAL DATA)

RS232C IN	1
LAN Port	1
USB	1

