


Digital Signage

# SHARP/ NEC MULTISYNC M321

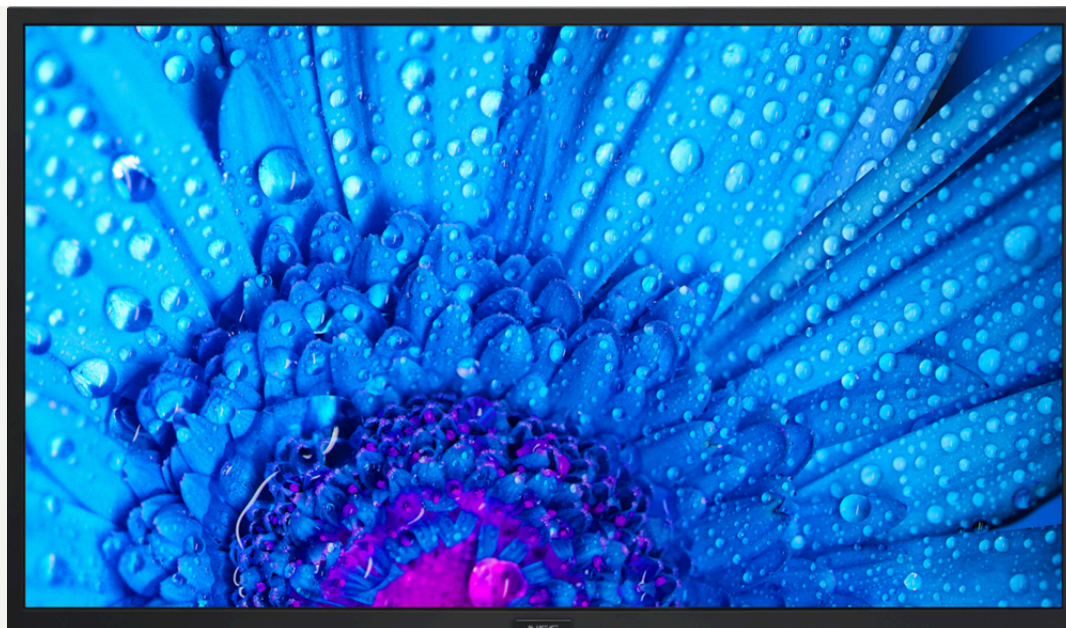

## Intuitiv, professionel levering af indhold.

- Moderne og slankt design – robust, men elegant, mulighed for diskret integration i hvilken som helst anvendelse og alle miljøer.
- Sikker fjernstyring – styr dine enheder sikkert på afstand ved hjælp af NEC NaviSet Administrator 2. Administrér vedligeholdelsesbehovene proaktivt, og spar tid og ressourcer.
- Uhindret læsbarhed – ingen genspejling fra vinduer eller andre lyskilder betyder, at skiltens indhold eller præsentationen i mødelokalet hele tiden er synlige.
- Missionskritisk, klar til drift 24/7 – valget af industrielle komponenter og omhyggeligt design fokuseret på svære anvendelsesscenerier går hånd i hånd med en imponerende og uafbrudt brugeroplevelse.
- Fremtidssikrede forbindelsesmuligheder – udstyret med flere digitale og analoge signalindgange, der opfylder industristandarderne, for at sikre fleksibel integration i AV-infrastrukturer.

# Specifikationer

## Accessories

[AVSpecificationAccessories]	Remote Control Transmitter, Installation Set-Up Manual, Power Cord, HDMI Cable, Mounting Bracket, Tabletop Stand
Shipping Content	2 x AAA batteries, Display, HDMI Cable, Power Cable, Remote Control, Setup Manual
Panel Technology	IPS with Direct LED backlights
Native Resolution (Pixels)	1920 x 1080
Aspect Ratio	16:9
Brightness (cd/m2)	450
Contrast Ratio	1100:1
Response Time (grey to grey avg) ms	8
Viewing Angle [°]	178
Colour Depth [bn]	16.7 (8bit)
Landscape	True
Portrait	True
Horizontal	True
Mounting (VESA/Number of Points/Pitch mm)	100 x 100 (FDMI), 200 x 200 (FDMI)
Mounting (VESA/Number of Points/Pitch mm)	4
Mounting Screw Specification (Size/Max Length)	M4
DisplayPort	2
HDMI	4
Audio 3.5mm Jack	1
VGA	1
RS232C IN	1
USB	1
Operating Humidity (min) [%]	20
Operating Humidity (max) [%]	80
Haze Level [%]	Pro 28

Special Characteristics	Powered USB Port (10 W), Removable Logo, Powered USB Port (15 W)
24/7 Operation Certified	True
Limited Manufacturer's Warranty (yrs.)	3
Built in Speakers (W)	5 + 5
Power Management	True
Equipment Space (Mounting)	True
Temperature Sensor	True
Brightness Sensor	True
Scheduler / Timer	True
Remote Management	True
Operating Voltage(ACV) / Frequency(Hz)	100-240
Operating Voltage(ACV) / Frequency(Hz)	50-60
Power Consumption (W) (Operating MAX)	40
Operating Temperature (oC)	0 - 40
Storage Temperature [°C]	-20 - 60
Storage Humidity [%]	10
Storage Humidity [%]	90
Shipping Carton Dimensions (W/H/D) mm	870
Shipping Carton Dimensions (W/H/D) mm	527
Shipping Carton Dimensions (W/H/D) mm	160
Product Weight Without Stand (Kg)	6
Shipping Weight (Kg)	10
Bezel Size (L/R) mm	12
Bezel Size (U) mm	12
Bezel Size (L) mm	17
Diagonal Size (inches / cm)	32
Diagonal Size (inches / cm)	80
Energy Star	True
[AVSpecificationConnectivityOutputAudio35MmJack]1	

