

Laserprinter med scanner - Sort hvid A3


BP-70M45




BP-70M45 A3 er en SH MFP er en sikker printløsning til fremtidens arbejdsplads.

- 45ppm SH MFP med problemfri integration og forbindelse til cloudbaserede forretningsprocesapplikationer
- Funktionsrig hardware- og softwareplatform, der understøtter det hybride arbejdsmiljø
- Indbygget Microsoft® Teams-connector styrker samarbejdet ved at muliggøre direkte og sikker adgang til udskrivning til eller scanning fra dine Microsoft® Teams-kanaler
- Brancheførende system- og databeskyttelsesfunktioner, herunder BIOS-baseret sikkerhed og standard Trusted Platform Module, sikrer, at fortrolige data holdes sikre
- Hold dine data, din enhed og dit netværk sikkert med Bitdefender antimalwarebeskyttelsessoftware (ekstraudstyr)
- Interager med MFP'en direkte fra din mobile enhed via WiFi, AirPrint, Bluetooth, NFC og QR-kode
- Udskriv sikkert fra eller scan til offentlige cloudlagertjenester hurtigt og nemt med enkeltlogon
- 10.1-tommer farve LCD-kontrolpanel tilbyder en smartphone-stil brugergrænseflade, der gør alt let at få adgang til og bruge
- Scan med hastigheder på op til 280ipm med valgfri dobbelttilførselsdetektion for at eliminere produktivetsafbrydelser
- Omfattende efterbehandlingsmuligheder, herunder en foldeenhed, giver endnu mere fleksibilitet til dit udskriftsoutput
- Overlegen miljøpræstation giver lavere standbystrømforbrug og lav TEC-værdi
- Hold dig opdateret og kompatibel med eksterne firmware- og programopdateringer via Sharp Application Portal

Konfiguration

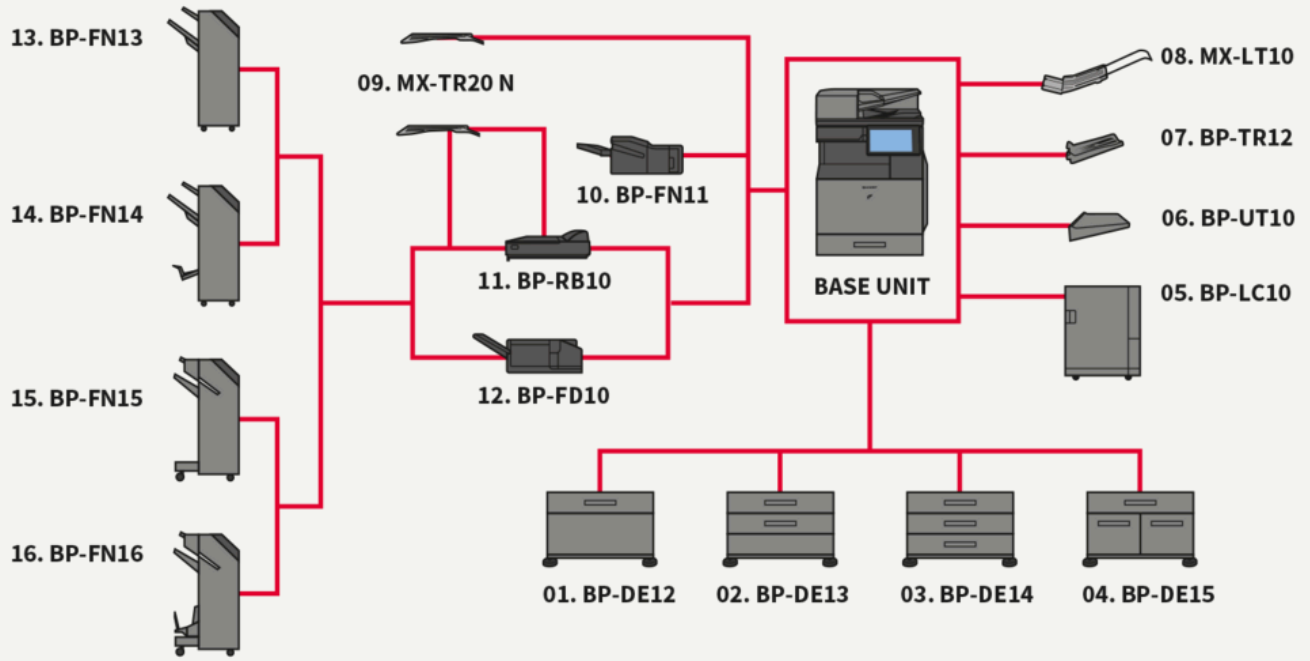

Dimensioner

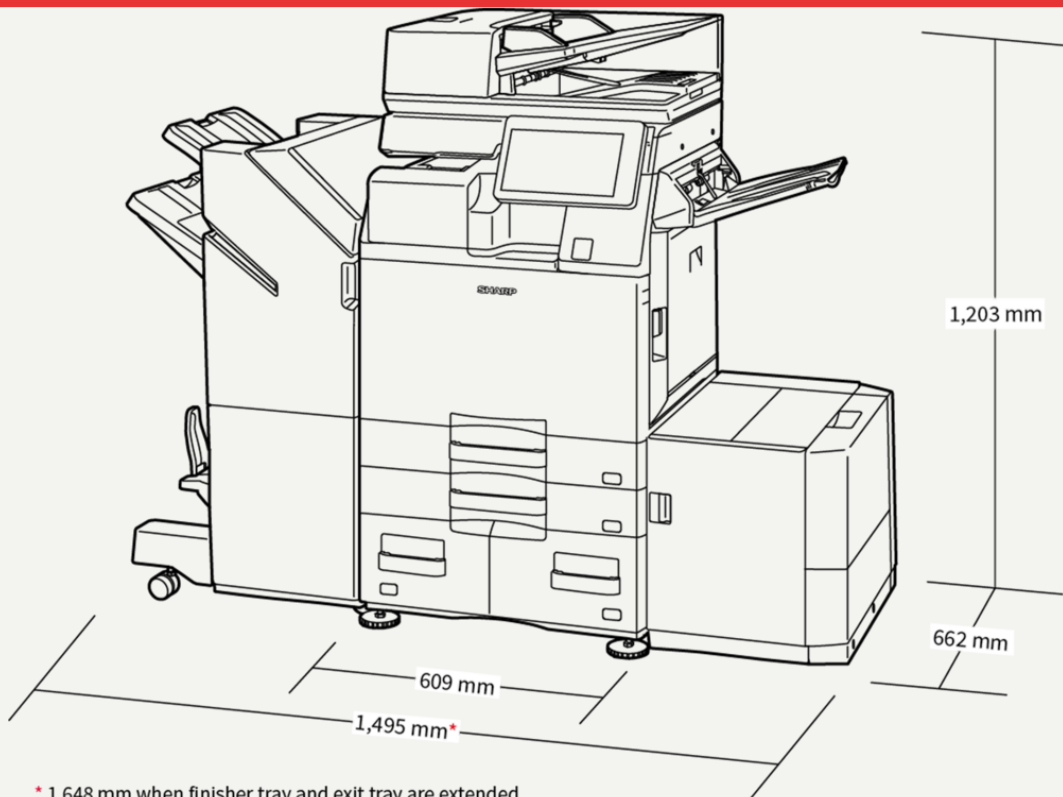

Options

Basis enhed

BP-LC10 Large Capacity Tray

3,000 sheets (based on 80 g/m²), A4-B5 (60-220 g/m²)

BP-DE14 Stand with 3 x 550-sheet Paper Drawers

550 sheets each for lower and upper trays (based on 80 g/m²), SRA3-A5R (60-300 g/m²)

BP-UT10 Utility Table

BP-DE13 Stand with 2 x 550-sheet Paper Drawers

550 sheets each for lower and upper trays (based on 80 g/m²), SRA3-A5R (60-300 g/m²)

BP-DD10 Double Feed Detection Unit

Eliminates double feeding of paper while scanning

BP-DE15 Stand with 550 + 2100-sheet Paper Drawers

Upper tray: SRA3-A5R, 550 sheets* (60-300 g/m²); Lower tray (Left): A4, 1,200 sheets* (60-105 g/m²); Lower tray (Right): A4 - B5, 900 sheets* (60-105 g/m²); * Number of sheets based on 80 g/m²

BP-DE12 Stand with 550-sheet Paper Drawer

550 sheets (based on 80 g/m²), SRA3-A5R (60-300 g/m²)

Sikkerhed

BP-FR12U Data Security Kit

Commercial version

BP-VD10 Virus Detection Kit

Opbevaring

BP-SD10 High Capacity SSD

512GB SSD

Trykning

MX-PF10 Barcode Font Kit

Enables barcode printing

Sharp OSA

MX-AMX1 Application Integration Module

Fax

MX-FWX1

BP-FX11 Fax Expansion Kit

Efterbehandling

MX-LT10 Long Paper Feeding Tray

Recommended for banner printing

MX-PN15D Punch Module - 4 Hole Wide

Punch module for BP-FN13/BP-FN14/MX-FN28/MX-FN29

MX-PN14D Punch Module - 4 Hole Wide

Punch module for BP-FN11/BP-FN12

BP-FN14 1k Saddle Stitch Finisher

A3W-A5R (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 1,000-sheet paper capacity (based on 80 g/m²); Stapling capacity: max. 50-sheet multi-position staple (based on 80 g/m²); Saddle stitch tray (lower): 7 sets (11-15 sheets), 10 sets (6-10 sheets), 20 sets (1-5 sheets). 15 sheets max per set; Requires BP-RB10 Paper Pass Unit

MX-PN16D Punch Module - 4 Hole Wide

Punch module for BP-FN15/BP-FN16/MX-FN30/MX-FN31/MX-FN34/MX-FN35

MX-PN15C Punch Module - 2/4 Hole

Punch module for BP-FN13/BP-FN14/MX-FN28/MX-FN29

MX-PN14C Punch Module - 2/4 Hole

Punch module for BP-FN11/BP-FN12

BP-FN13 1k Finisher

A3W-A5R (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 1,000-sheet paper capacity (based on 80 g/m²); Stapling capacity: max. 50-sheet multi-position staple (based on 80 g/m²); Requires BP-RB10 Paper Pass Unit

BP-FD10 Folding Unit

200 sheets (based on 80 g/m²), A3, B4, A4R (Z-fold, half fold), A3, A4R (C-Fold, Accordion fold), 60-256 g/m²

MX-PN16C Punch Module - 2/4 Hole

Punch module for BP-FN15/BP-FN16/MX-FN30/MX-FN31/MX-FN34/MX-FN35

MX-PN15B Punch Module - 3 Hole

Punch module for BP-FN13/BP-FN14

MX-PN14B Punch Module - 3 Hole

Punch module for BP-FN11/BP-FN12

BP-TR12 Exit Tray Unit

BP-RB10 Paper Pass Unit

Required when using BP-FN13, BP-FN14, BP-FN15 or BP-FN16

BP-FN16 3k Saddle Stitch Finisher

A3-B5 (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 3,000-sheet paper capacity (based on 80 g/m²); Stapling capacity: max. 65-sheet multi-position staple (based on 80 g/m²); Manual Stapling: 1-point at rear (Flat), 45 sheets (64 g/m²), 40 sheets (80 g/m²); Stapleless capacity: max. 10-sheet (64 g/m²), 8 sheet (65 - 81.4 g/m²), 6 sheet (81.5 - 105 g/m²); Saddle stitch tray (lower): 10 sets (11-20 sheets), 15 sets (6-10 sheets), 25 sets (1-5 sheets). 20 sheets max per set; Requires BP-RB10 Paper Pass Unit

BP-FN11 Inner Finisher

A3 - B5 (offset/staple), SRA3 - A5R (non offset); Offset tray (upper): max. 500-sheet paper capacity (based on 80 g/m²); Stapling capacity: max. 50-sheet multi-position staple (based on 80 g/m²); Manual Stapling: 1-point at rear (Flat), 45 sheets (64 g/m²), 40 sheets (80 g/m²); Stapleless capacity: max.10-sheet (64 g/m²), 8 sheet (65-81.4 g/m²), 6 sheet (81.5-105 g/m²); Requires BP-RB10 Paper Pass Unit

MX-PN16B Punch Module - 3 Hole

Punch module for BP-FN15/BP-FN16

BP-FN15 3k Finisher

A3-B5 (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 3,000-sheet paper capacity (based on 80 g/m²); Stapling capacity: max. 65-sheet multi-position staple (based on 80 g/m²); Manual Stapling: 1-point at rear (Flat), 45 sheets (64 g/m²), 40 sheets (80 g/m²); Stapleless capacity: max. 10-sheet (64 g/m²), 8 sheet (65 - 81.4 g/m²), 6 sheet (81.5 - 105 g/m²); Requires BP-RB10 Paper Pass Unit

Specifikationer

Generelt

| | |
|--------------------------------------|------|
| Hastighed - s/h sider pr. minut (A4) | 45 |
| Teknologi | 21 |
| Papir størrelse: Min. | A6R |
| Papir størrelse: Max. | A3W |
| Papir vægt: Min. (g/m ²) | 55 |
| Papir vægt: Max. (g/m ²) | 300 |
| Papirkapacitet :Standard (ark) | 650 |
| Papirkapacitet :Max (ark) | 6300 |
| Opvarmningstid (sek.) | 14 |
| Hukommelse general: Max.(GB) | 5 |
| [MFPSpecificationStorageStd] | SSD |
| [MFPSpecificationStorageOpt] | SSD |
| [MFPSpecificationSsdCapStdGb] | 256 |
| [MFPSpecificationSsdCapOptGb] | 512 |
| Duplex | Std. |
| Strømkrav: frekvens min (Hz) | 50 |
| Strømkrav: frekvens min (Hz) | 60 |
| Strømforbrug (kW) | 1,84 |
| Base Unit bredde (mm) | 609 |
| Base Unit dybde (mm) | 662 |
| Base Unit højde (mm) | 860 |
| Vægt (kg) | 72 |
| Strømkrav: spænding (V) | 220 |
| Strømkrav: spænding (V) | 240 |

Fax

| | |
|--|-------------------|
| Fax | Opt. |
| Kompressionsmetode | MH, MR, MMR, JBIG |
| Kommunikationsprotokol | Super G3, G3 |
| Overførselshastighed (sek.) | 2 |
| Modem hastighed: Min. (bps) | 2400 |
| Modem hastighed: Max. (bps) | 33600 |
| Overførselsopløsning: Std (dpi) | 203.2 x 97.8 dpi |
| Overførselsopløsning: Ultra Fine (dpi) | 406.4 x 391 dpi |
| Dokument størrelse (min.) | A5 |
| Dokument størrelse (max.) | A3 |
| Hukommelse: Max (GB) | 4 |
| Gråtone niveauer | 256 |
| Registrering af indkommende / udgående fax | 2000 |
| Gruppesending | 500 |

Trådløst LAN

| | |
|-------------------|--|
| Trådløst LAN | Std. |
| Gældende regelsæt | IEEE802.11a/ac/b/g/n |
| Adgangstilstand | Infrastructure mode, Software AP mode |
| Sikkerhed | WEP, WPA/WPA2-mixed PSK, WPA/WPA2-mixed EAP, WPA2 PSK, WPA2 EAP, WPA2 EAP/WPA3-mixed, PSK/SAE, WPA3 SAE, WPA2/WPA3-mixed, WPA3 EAP |

Filer

| | |
|----------------|-------------------------------------|
| Dokument filer | Std. |
| Lagret jobs | Copy, Print, Scan, Fax transmission |
| Lagringsmappe | Quick file, Main, Custom (Max 1000) |

Toner Indhold

| | |
|------------------------------|-------|
| Sort (sider med 6% dækflade) | 40000 |
|------------------------------|-------|

Print

| | |
|---|---|
| Netværksprinter | Std. |
| Opløsning (dpi) | 1200 x 1200, 600 x 600, 9600 x 600 |
| Interface: Std. | USB 2.0, USB 3.0, 10Base-T, 100Base-TX, 1000Base-T |
| Understøttede operativsystemer (standard) | Windows 8.1, Windows 10, Windows 11, Windows Server 2012, Windows Server 2012R2, Windows Server 2016, Windows Server 2019, Mac OS X 10.10, Mac OS X 10.11, Mac OS X 10.12, Mac OS X 10.13, Mac OS X 10.14, Mac OS X 10.15, Mac OS X 11, Mac OS X 12 |
| Netværksprotokoller | TCP/IP (IPv4, IPv6) |
| Printerprotokoller | LPR, Raw TCP (port 9100), POP3 (e-mail printing), HTTP, FPT for downloading print files, IPP, SMB, WSD |
| Tilgængelig fonte | 80 PCL, 139 PostScript 3 |

Kopi

| | |
|--------------------------------------|------------------------------------|
| Original papir størrelse Max. | A3 |
| 1. s/h kopi (sek.) | 4,5 |
| E-sift | Opt. |
| Kontinuerlig kopiering (max. kopier) | 9999 |
| Scanneropløsning ved s/h (dpi) | 600 x 600, 600 x 400, 600 x 300 |
| Scanneropløsning ved farve (dpi) | 600 x 600 |
| Printeropløsning | 1200 x 1200, 600 x 600, 9600 x 600 |
| Gradueringer - farve | 256 |
| Gradueringer - s/h | 2 |
| Zoom rækkevidde: Min (%) | 25 |
| Zoom rækkevidde: Max (%) | 400 |
| Faste zoom-satser | 10 |
| Netværksscanner | Push scan, Pull scan |

Scan

| | |
|--------------------------------------|--|
| Scanningsmetode | Std. |
| Scanneropløsning - "push" scan (dpi) | 100, 150, 200, 300, 400, 600 |
| Scanneropløsning - "pull" scan (dpi) | 75, 100, 150, 200, 300, 400, 600, 50-9600 |
| Fil formater (standard) | TIFF, PDF, PDF/A-1a, PDF/A-1b, Encrypted PDF, Compact PDF, JPEG, XPS, Searchable PDF, Microsoft Office (pptx, xlsx, docx), Text (TXT), Rich Text (RFT) |
| Scandestinationer | Desktop, FTP, Email, Netværksmappe, USB hukommelse |

Efterbehandler

| | |
|------------------------------|------|
| Kapacitet. Min. (sider) | 500 |
| Kapacitet. Max. (sider) | 3000 |
| Hæfte kapacitet Max. (sider) | 65 |
| Falsning (folde-funktion) | Opt. |
| Off-set forskydning | Std. |
| Hulle funktion | Opt. |

