


# NEC MULTISYNC M551-MPI4

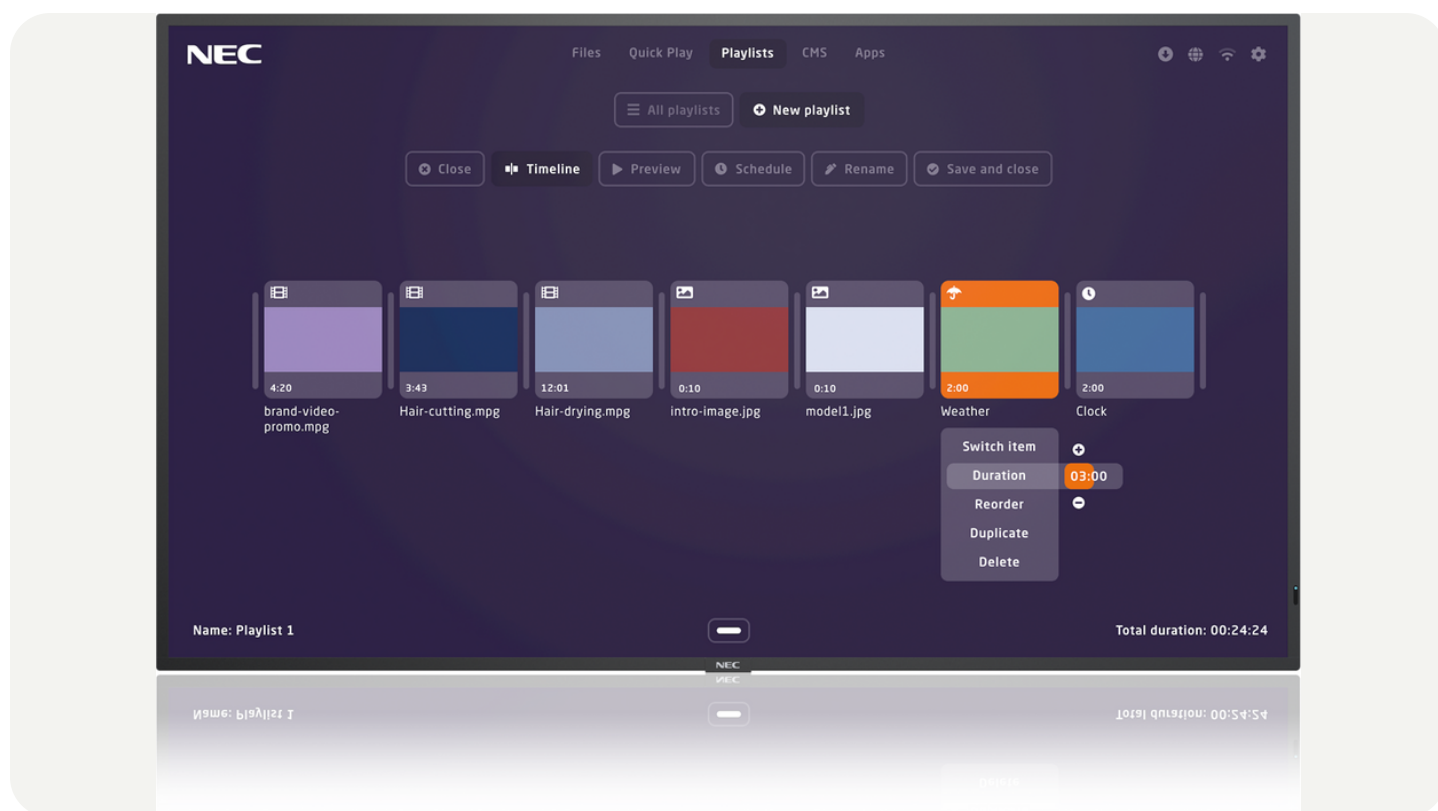

## Let implementering af digital skiltning og tidstro information.

- Moderne og slankt design – robust, men elegant, mulighed for diskret integration i hvilken som helst anvendelse og alle miljøer.
- Intuitiv Plug & Play-løsning – selvom brugerne ikke har kendskab til anvendelsen af digital skiltning, kan de bidrage til at skabe imponerende skiltning for at opnå immersive, tidstro, visuelle oplevelse
- Installér tredjeparters software – udvid NEC-medieafspillerfunktionen ved hjælp af ekstra apps, eller skift til dine foretrukne indholdsstyringssystemer (CMS, Content Management Systems) direkte fra N
- Få styr på det hele – der skal blot én grænseflade til for at styre NEC-medieafspilleren såvel som displayet direkte, via en webbaseret grænseflade eller NEC-displayets fjernstyring.
- Uhindret læsbarhed – ingen genspejling fra vinduer eller andre lyskilder betyder, at skiltens indhold eller præsentationen i mødelokalet hele tiden er synlige.

# Specifikationer

## Accessories

|                                                   |                                                                                                                                 |
|---------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| [AVSpecificationAccessories]                      | Remote Control Transmitter, Installation Set-Up Manual, Power Cord, HDMI Cable, Mounting Bracket, Tabletop Stand, Trolley Stand |
| Shipping Content                                  | 2 x AAA batteries, Display, HDMI Cable, Power Cable, Remote Control, Setup Manual, Pre-installed MPI4 MediaPlayer Kit           |
| Panel Technology                                  | IPS with Edge LED backlights                                                                                                    |
| Native Resolution (Pixels)                        | 3840 x 2160                                                                                                                     |
| Aspect Ratio                                      | 16:9                                                                                                                            |
| Brightness (cd/m2)                                | 500                                                                                                                             |
| Contrast Ratio                                    | 8000:1                                                                                                                          |
| Response Time (grey to grey avg) ms               | 8                                                                                                                               |
| Viewing Angle [°]                                 | 178                                                                                                                             |
| Shipping Carton Dimensions (W/H/D) mm             | 1430                                                                                                                            |
| Shipping Carton Dimensions (W/H/D) mm             | 920                                                                                                                             |
| Shipping Carton Dimensions (W/H/D) mm             | 250                                                                                                                             |
| Product Weight Without Stand (Kg)                 | 26                                                                                                                              |
| Shipping Weight (Kg)                              | 37                                                                                                                              |
| DisplayPort                                       | 1                                                                                                                               |
| HDMI                                              | 2                                                                                                                               |
| Audio 3.5mm Jack                                  | 1                                                                                                                               |
| RS232C IN                                         | 1                                                                                                                               |
| LAN Port                                          | 1                                                                                                                               |
| USB                                               | 1                                                                                                                               |
| Diagonal Size (inches / cm)                       | 55                                                                                                                              |
| Diagonal Size (inches / cm)                       | 139                                                                                                                             |
| Energy Star                                       | True                                                                                                                            |
| [AVSpecificationConnectivityOutputAudio35MmJack]1 |                                                                                                                                 |

|                                                |                                                                              |
|------------------------------------------------|------------------------------------------------------------------------------|
| Special Characteristics                        | Frame Comp, Powered USB Port (10 W), Removable Logo, Powered USB Port (15 W) |
| 24/7 Operation Certified                       | True                                                                         |
| Limited Manufacturer's Warranty (yrs.)         | 3                                                                            |
| Local Dimming                                  | True                                                                         |
| Built in Speakers (W)                          | 10 + 10                                                                      |
| Computer Input - Plug and Play                 | True                                                                         |
| Power Management                               | True                                                                         |
| Equipment Space (Mounting)                     | True                                                                         |
| Cabinet Colour                                 | Black                                                                        |
| Temperature Sensor                             | True                                                                         |
| Brightness Sensor                              | True                                                                         |
| IP Rating                                      | True                                                                         |
| Scheduler / Timer                              | True                                                                         |
| Remote Management                              | True                                                                         |
| Operating Voltage(ACV) / Frequency(Hz)         | 100-240                                                                      |
| Operating Voltage(ACV) / Frequency(Hz)         | 50-60                                                                        |
| Power Consumption (W) (Operating MAX)          | 110                                                                          |
| Operating Temperature (oC)                     | 0 - 40                                                                       |
| Storage Temperature [°C]                       | -20 - 60                                                                     |
| Storage Humidity [%]                           | 10                                                                           |
| Storage Humidity [%]                           | 90                                                                           |
| Landscape                                      | True                                                                         |
| Portrait                                       | True                                                                         |
| Mounting (VESA/Number of Points/Pitch mm)      | 300 x 300                                                                    |
| Mounting (VESA/Number of Points/Pitch mm)      | 4                                                                            |
| Mounting Screw Specification (Size/Max Length) | M6                                                                           |
| Bezel Size (L/R) mm                            | 13                                                                           |
| Bezel Size (U) mm                              | 12                                                                           |
| Bezel Size (L) mm                              | 16                                                                           |
| Operating Humidity (min) [%]                   | 20                                                                           |
| Operating Humidity (max) [%]                   | 80                                                                           |
| Haze Level [%]                                 | 28                                                                           |



Design and specifications are subject to change without prior notice. All information was correct at time of print. Microsoft, Excel, PowerPoint, OneDrive, SharePoint, Active Directory, Windows Server, and Windows are either registered trademarks or trademarks of Microsoft Corporation in the US and/or other countries. Adobe and PostScript 3 are either registered trademarks or trademarks of Adobe Systems Incorporated in the US and/or other countries. Google Drive, Gmail, Android, and Google Cloud Print are trademarks of Google LLC. The Google Drive trademark is used with permission from Google LLC. Box is a trademark, service mark, or registered trademark of Box, Inc. QR Code is a registered trademark of DENSO WAVE INCORPORATED in Japan and other countries. AirPrint and Mac are trademarks of Apple Inc., registered in the US and other countries. PCL is a registered trademark of Hewlett\_x0002\_Packard Company. Qualcomm DirectOffice is a product of Qualcomm Technologies, Inc. and/or its subsidiaries. Qualcomm is a trademark of Qualcomm Incorporated, registered in the US and other countries. DirectOffice is a trademark of CSR Imaging US, LP, registered in the US and other countries. All other company names, product names and logotypes are trademarks or registered trademarks of their respective owners. ©Sharp Corporation All trademarks acknowledged. E&O. Ref: NEC MultiSync M551-MPI4, 20/5/2026