

A3 sort hvid produktionsprintere

MX-M1056


Højeste effektivitet og Fiery® klar til overlegen kontrol



- Højvolumen produktionsprinter med hastigheder op til 105 ppm og 1.200 × 1.200 dpi opløsning
- 300-arks DSPF scanner dokumenter ved 240 ipm* (tosidet) og håndterer papir op til 220 g/m2 tykt
- Nem UI-tilstand på 15,4-tommer vipbart LCD-touchskærm giver let og intuitiv betjening
- Omfattende sortiment af efterbehandlingsmuligheder, herunder GBC inline-stansning og Plockmatic inline-finish, tilbyder professionel intern hæftfremstilling
- Kraftig Fiery® Server (ekstraudstyr) til styring af travle printmiljøer, der leverer end-to-end effektivitet for maksimal produktivitet og lavere driftsomkostninger
- Forbedret produktivitet med papirbakke med stor kapacitet, inklusive SRA3-kompatibilitet, for længere uafbrudt udskrivning
- Enestående brugervenlighed med dedikerede brugerikoner for let login, kontrolpanel, der kan vippes for nem visning og statusindikatorlampe, der giver dig besked, når printeren er klar til handling
- Avanceret system-/databeskyttelse og adgangskontrol, herunder selv-gendannelse af firmware og hvidliste


*: Originaler pr. minut; ved fremføring af A4 (8 1/2" x 11") ark

Konfiguration

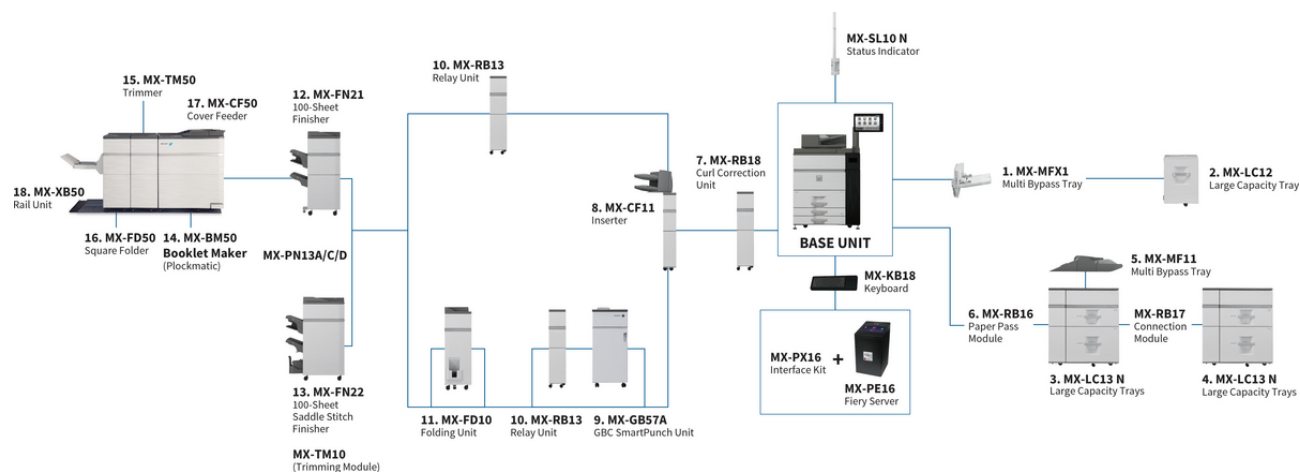

Konfigurationer kan variere pr. Salgsregion. Kontakt din lokale Sharp-repræsentant for yderligere information.

Dimensioner

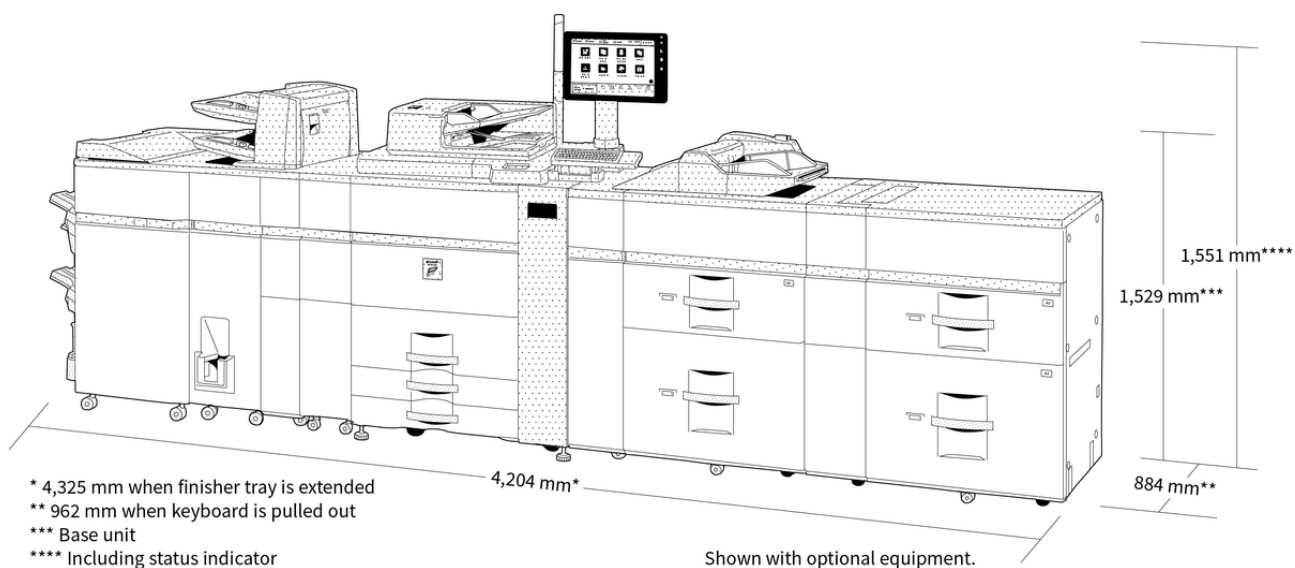

Målene vises med ekstraudstyr. Indstillingerne kan variere pr. Region.

Options

Base Unit

MX-KB18 Keyboard

MX-SL10N Status Indicator lamp

1. MX-MFX1 Multi Bypass Tray (for main machine)

A5R-A3W, 100 sheets (80 g/m2) Can be end of configuration.

2. MX-LC12 Large Capacity Tray (A4)

A4-B5, 3,500 sheets (80 g/m2)

Requires MX-MFX1. Cannot be installed with MX-LC13N or MX-LCX3 N.

3. MX-LC13 N Large Capacity Trays (A3)

Requires MX-MF11. Cannot be installed with MX-LC12 or MX-MFX1.

4. MX-LC13 N Large Capacity Trays (A3)

Requires MX-RB17 Connection Module.

Cannot be installed with MX-LC12 or MX-MFX1.

5. MX-MF11 Multi Bypass Tray (for MX-LC13N)

A3-A5R, 500 sheets (80 g/m2).

MX-RB17 Connection Module

(Required between 2 x MX-LC13 N)

6. MX-RB16 Paper Pass Module

(between machine and MX-LC13 N). Required if MX-LC13 N is installed.

Printing

MX-PF10 Barcode Font Kit

Security

MX-FR66U Data Security Kit

Finishing

MX-PE16 Fiery Server. Requires MX-PX16 Interface Kit.

MX-PX16 Interface Kit. Requires MX-PE16.

7. MX-RB18 Curl Correction Unit. Required if MX-FN21 or MX-FN22 is installed.

8. MX-CF11 Inserter (200-sheet x 2 bin)

A3-A5R, 200 sheets each (80 g/m2).

Requires MX-RB18 and either MX-RB13 or MX-FD10.

9. MX-GB57A GBC SmartPunch Unit (A4)

Available die sets: 21 holes, Plastic Comb; 20 holes, Plastic Comb

47 holes, Color Coil; 23 holes, Wire 2:1/Square

23 holes, Wire 2:1/Round; 34 holes, Wire 3:1/Square

34 holes, Wire 3:1/Round; 12 holes, VeloBind

34 holes, PloClick; 2 holes/Round (8mm pin)

4 holes/Round (8mm pin); 2 holes/Round (6.5mm pin)

4 holes/Round (6.5mm pin); 4 holes Scandinavian

Custom die sets also available on request

Requires MX-RB13 and either MX-FN21 or MX-FN22.

10. MX-RB13 Relay Unit (between 100-sheet Finisher and Inserter)

Must be installed if MX-FD10 is not required.

11. MX-FD10 Folding Unit (Z, C, accordion, double & half folds)

Can only be installed with MX-FN21 or MX-FN22.

12. MX-FN21 Finisher (4k - 100-sheet staple)

A3 - B5 (offset/staple), SRA3 - A5R (non offset)

Upper tray: 1,500 sheets*; Middle tray: 250 sheets*; Lower tray: 2,500 sheets*

100-sheet* staple capacity (front, rear or 2 point stitching)

Requires MX-RB18. Cannot be installed with MX-FN22.

13. MX-FN22 Saddle Stitch Finisher (4k - 100-sheet staple)

A3 - B5 (offset/staple), SRA3 - A5R (non offset)

Upper tray: 1,500 sheets*; Middle tray: 250 sheets*; Lower tray: 2,500 sheets*

100-sheet* staple capacity (front, rear or 2 point stitching)

Saddle stitch tray: 5 sets (16-20 sheets),

10 sets (11-15 sheets), 15 sets (6-10 sheets); 25 sets (1-5 sheets).

Max 20 sheets per set.

Requires MX-RB18. Cannot be installed with MX-FN21.

MX-PN13A/C/D Punch Module (A: 2, C: 2/4, D: 4 wide).

Requires MX-FN21 or MX-FN22.

MX-TM10 Trimming Module Can only be installed with MX-FN22.

14. MX-BM50 Booklet Maker (Plockmatic) A4, A3, SRA3. Requires MX-FN21.

Paper size: 206 x 275 mm (Min) to 320 x 457.2 mm (Max).

Paper Weight: 64-300 g/m2

Capacity: 1-30 sheets* (stapled and folded); 1-6 sheets* (non-stapled and folded).

15. MX-TM50 Trimmer (Plockmatic). Requires MX-BM50.

Trim Length: 1-16 mm, Default: 4.5mm

16. MX-FD50 Square Folder (Plockmatic) A4, A3, SRA3.

Requires MX-BM50 & MX-TM50.

Paper size: 206 x 275 mm (Min) to 320 x 457.2 mm (Max)

Paper Weight: 64-300 g/m2. Capacity: 1-30 sheets* (stapled and folded).

17. MX-CF50 Cover Feeder (Plockmatic) Requires MX-BM50.

18. MX-XB50 Rail Unit (Plockmatic) Requires MX-BM50

* A4 or smaller, 80 g/m2.

Scanning

AR-SU1 Stamp Unit

Marks already scanned documents for checking.

Sharp OSA®

MX-AMX1 Application Integration Module

Specifikationer

GENERELT

Hastighed - s/h sider pr. minut (A4)	105
Hastighed - s/h sider pr. minut (A3)	52
Papirstørrelse: min. - max.	SRA3 - A5R
Papirvægt (g/m ²)	52 - 300
Papirkapacitet: Standard (ark)	3100
Papirkapacitet: Max (ark)	13500
Opvarmningstid (sek.)	200
Hukommelse generelt (Gb)	6
Harddisk	STD
Harddisk kapacitet (GB)	1000
Duplex	STD
Strømkrav	220-240V, 13A, 50 / 60Hz
Strømforbrug (kW)	2,99
Mål (B x D x H) (mm.)	1099 x 775 x 1529
Vægt (kg)	276

DOKUMENTFREMFØRER

Originalkapacitet (ark)	300
Scanningshastighed: s/h	120 (simplex) 240 (duplex)
Scanningshastighed: farve	120 (simplex) 240 (duplex)

DOKUMENTARKIVERING

Dokumentarkivering (standard / tilbehør)	STD
Arkiveringskapacitet - hovedmappe / brugermapper (sider)	35000
Arkiveringskapacitet - hurtigmappe (sider)	10000
Lagret jobs	Copy, print, scan
Lagringsmappe	Quick file folder, main folder, custom folder (max. 1000)
Konfidentiel lagring	•

EFTERBEHANDLING

Kapacitet	4250
Hæfte kapacitet (sider) max.	100
Falsning (folde-funktion)	OPT
Off-set forskydning	STD
Hulle funktion	OPT
Hullemodul	OPT
Indsættelse	OPT
Foldeenhed (falsning)	OPT

KOPIMASKINE

Originalstørrelse (Max.)	A3
1. s/h kopi (sek.)	3,2
Elektronisk sortering standard	•
Kontinuerlig kopiering (max. kopier)	9999
Scanneropløsning ved s/h (dpi)	600 x 600
Scanneropløsning ved farve (dpi)	600 x 600
Printeropløsning	1200 x 1200
Gradueringer - s/h	256
Zoomområde (%)	25 - 400
Faste zoom-satser	10 (5E / 5R)

SCANNER

Netværksscanner (standard / tilbehør)	STD
Scanningsmetode - "push" eller "pull" scan	•
Scanneropløsning - "push" scan (dpi)	100, 150, 200, 300, 400, 600
Scanneropløsning - "pull" scan (dpi)	75, 100, 150, 200, 300, 400, 600
Fil formater	TIFF, PDF, PDF / A-1b, Encrypted PDF, Compact PDF, JPEG, XPS, Searchable PDF, OOXML (pptx, xlsx, TXT (UTF-8), RTF
Scannerdestinationer desktop	•
Scannerdestinationer FTP, E-mail	•
Scannerdestinationer netværksmappe	•
Scannerdestinationer USB hukommelse	•

PRINTER

Netværksprinter (standard / tilbehør)	STD
Opløsning (dpi)	1200 x 1200
Forbedret opløsning (dpi)	1200 x 1200
Interface Standard / Tilbehør	Std USB 2.0, 10Base-T / 100Base-TX / 1000Base-T
Understøttede operativsystemer standard	Windows 8.1, 10. Windows Server 2012, 2012R2, 2016, 2019. Mac OS X 10.9, 10.10, 10.11, 10.12, 10.13, 10.14, 10.15, 11
Netværksprotokoller	TCP / IP
Printerprotokoller	LPR, Raw TCP (port 9100), POP3 (e-mail printing), HTTP, Novell Printserver application with NDS and Bindery, FPT for downloading print files, EtherTalk printing, IPP
PDL standard / tilbehør	Std PCL6, Genuine Adobe PS3
Tilgængelig fonte	80 (PCL), 136 (PS3)

TONER INDHOLD

Sort (sider med 6% dækflade)	120000
------------------------------	--------