


Digital Signage

PN-HY431

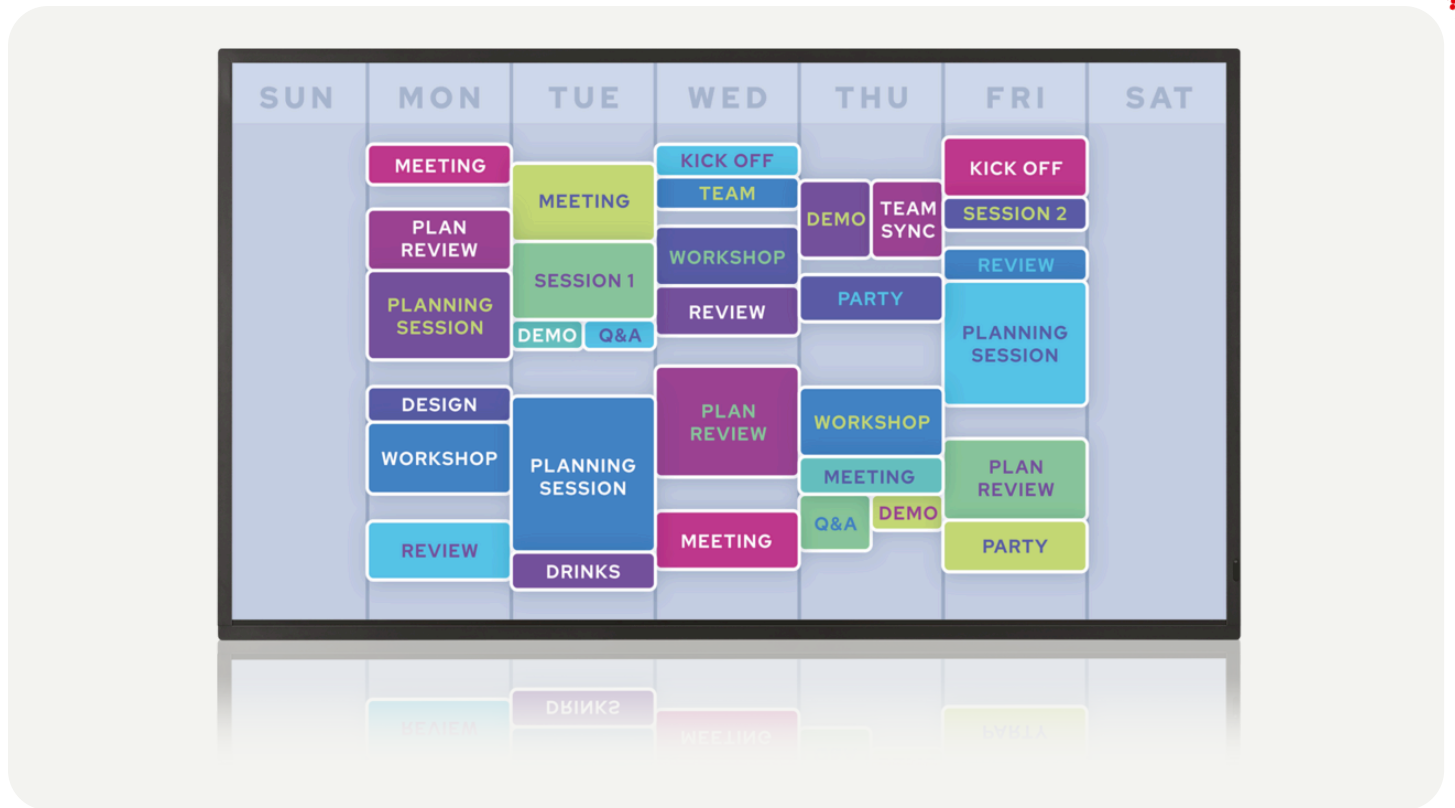

With the PN-HY431, you can enjoy the perfect combination of an elegant design and crystal clear pictures whether it's a meeting room, reception area or other retail environments.

- Make an impact with the 43 display in your retail or corporate environments
- Showcase images and video in detail with 4K Ultra HD resolution (3840 x 2160 pixels)
- Enhanced and true representation of colour shown from wide colour gamut
- Continuous display of content during business operating hours 16/7
- Show and hear content easily with integrated 4K USB media player and speakers
- Latest HDMI Connectivity for 4K at 60Hz
- Slim, sleek and elegant design to suit any setting
- Flexible installation in portrait and landscape

Specifikationer

Accessories

[AVSpecificationAccessories]	Remote Control Transmitter, Operation Manual, Installation Set-Up Manual, CD Rom, Power Cord, Battery, Cable Clamp, Portrait Mount Sticker Kit
Panel Technology	TFT-LCD
Native Resolution (Pixels)	3840 x 2160
Aspect Ratio	16:9
Backlight Technology	W-LED / Full Array
Brightness (cd/m2)	500
Contrast Ratio	1200:1
Display Colours	1060
Response Time (grey to grey avg) ms	8
Pixel Pitch (mm H/V)	0,245
Viewing Angle [°]	178
Active Screen Area (H/V) mm	941 x 529
Landscape	True
Portrait	True
Horizontal	True
Mounting (VESA/Number of Points/Pitch mm)	200 x 200
Mounting (VESA/Number of Points/Pitch mm)	4
Mounting Screw Specification (Size/Max Length)	M6
RS232C IN	1
LAN Port	1
USB	1
Operating Humidity (min) [%]	20
Operating Humidity (max) [%]	80
CE, CB Report	True

24/7 Operation Certified	True
Built in Speakers (W)	10 + 10
Computer Input - Plug and Play	True
Power Management	True
Cabinet Colour	Black
Fanless	True
Temperature Sensor	True
Residual Image Reduction Feature	True
Multi-Screen Function - Videowall Mode (Enlarge Feature)	True
Multi Language OSD	True
Remote Management	True
Adjustment Lock Feature	True
Displaying Use Time Feature	True
Screen Adjustment	True
Colour Temperature Adjustment	True
Gamma Adjustment	True
Self-Adjust	True
Hardware Diagnosis	True
Temperature Control	True
RS232C Communication Speed Change	True

Operating Voltage(ACV) / Frequency(Hz)	100-240
Operating Voltage(ACV) / Frequency(Hz)	50-60
Power Consumption (W) (Standby)	50
Operating Temperature (oC)	0 - 40

HDMI	3
Audio 3.5mm Jack	1
VGA	1

Diagonal Size (inches / cm)	43
Diagonal Size (inches / cm)	107

Audio RCA R-L	1
---------------	---

Product Weight Without Stand (Kg)	115
-----------------------------------	-----

