


Digital Signage

PN-HS501

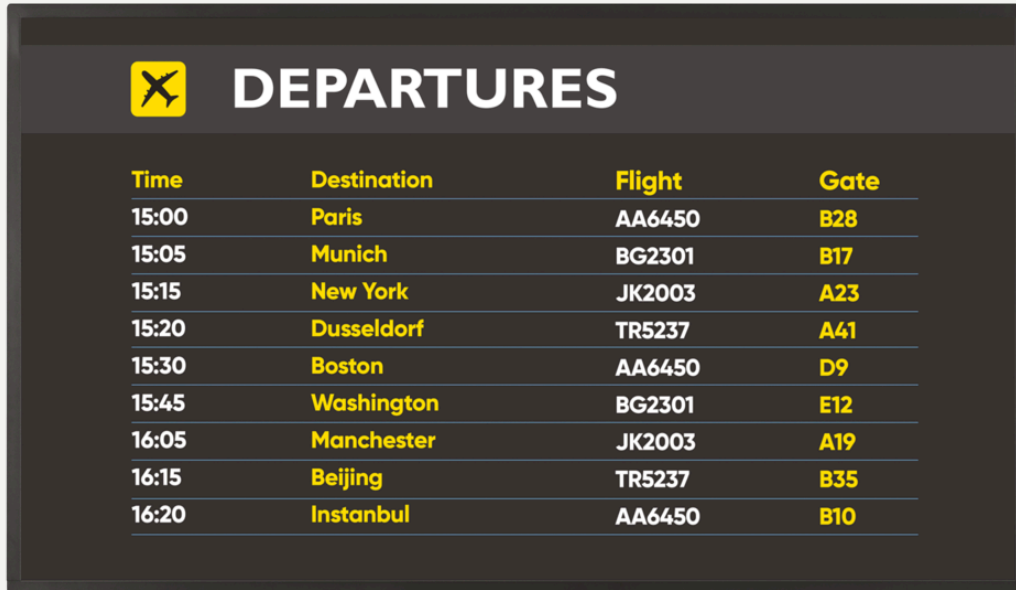

Time	Destination	Flight	Gate
15:00	Paris	AA6450	B28
15:05	Munich	BG2301	B17
15:15	New York	JK2003	A23
15:20	Dusseldorf	TR5237	A41
15:30	Boston	AA6450	D9
15:45	Washington	BG2301	E12
16:05	Manchester	JK2003	A19
16:15	Beijing	TR5237	B35
16:20	Istanbul	AA6450	B10

The new professional PN-HS431 UHD large format digital signage which can be easily used transport, retail and corporate applications. The 700 cd/m² is good for bright environments and the monitor can run around the clock 24/7.

- Make an impact with the 50 display in your retail, corporate or transport environments
- Showcase images and video in detail with 4K Ultra HD resolution (3840 x 2160 pixels)
- Enhanced and true representation of colour shown from wide colour gamut
- Continuous display of content during operating hours 24/7
- Show and hear content easily with integrated 4K USB media player and speakers
- Latest HDMI Connectivity for 4K at 60Hz
- 50.000h backlite lifetime (portrait/landscape 25°C)
- Flexible installation in portrait, landscape and face-up/-down (360°)

Specifikationer

Accessories

[AVSpecificationAccessories]	Remote Control Transmitter, Operation Manual, Installation Set-Up Manual, CD Rom, Power Cord, Battery, Cable Clamp, Portrait Mount Sticker Kit
Panel Technology	TFT-LCD
Native Resolution (Pixels)	3840 x 2160
Aspect Ratio	16:9
Backlight Technology	W-LED / Full Array
Brightness (cd/m2)	700
Contrast Ratio	4000:1
Display Colours	1060
Response Time (grey to grey avg) ms	8
Pixel Pitch (mm H/V)	0,285
Viewing Angle [°]	178
Active Screen Area (H/V) mm	1095 x 616
Operating Voltage(ACV) / Frequency(Hz)	100-240
Operating Voltage(ACV) / Frequency(Hz)	50-60
Operating Voltage(DCV)	150
Power Consumption (W) (Standby)	50
Operating Temperature (oC)	0 - 40
HDMI	3
Audio 3.5mm Jack	1
VGA	1
Bezel Size (L/R) mm	15
Bezel Size (U) mm	15
Bezel Size (L) mm	15
Audio RCA R-L	1
CE, CB Report	True
Haze Level [%]	25

24/7 Operation Certified	True
Built in Speakers (W)	10 + 10
Computer Input - Plug and Play	True
Power Management	True
Cabinet Colour	Black
Fanless	True
Temperature Sensor	True
Residual Image Reduction Feature	True
Multi-Screen Function - Videowall Mode (Enlarge Feature)	True
Multi Language OSD	True
Remote Management	True
Adjustment Lock Feature	True
Displaying Use Time Feature	True
Screen Adjustment	True
Colour Temperature Adjustment	True
Gamma Adjustment	True
Self-Adjust	True
Hardware Diagnosis	True
Monitor Control Software Support	True
Temperature Control	True
Landscape	True
Portrait	True
Mounting (VESA/Number of Points/Pitch mm)	400 x 400
Mounting Screw Specification (Size/Max Length)	M6
RS232C IN	1
LAN Port	1
USB	1
Diagonal Size (inches / cm)	50
Diagonal Size (inches / cm)	125
Operating Humidity (min) [%]	20
Operating Humidity (max) [%]	80
Product Weight Without Stand (Kg)	15

