


Videovæg

NEC MULTISYNC UN552VS

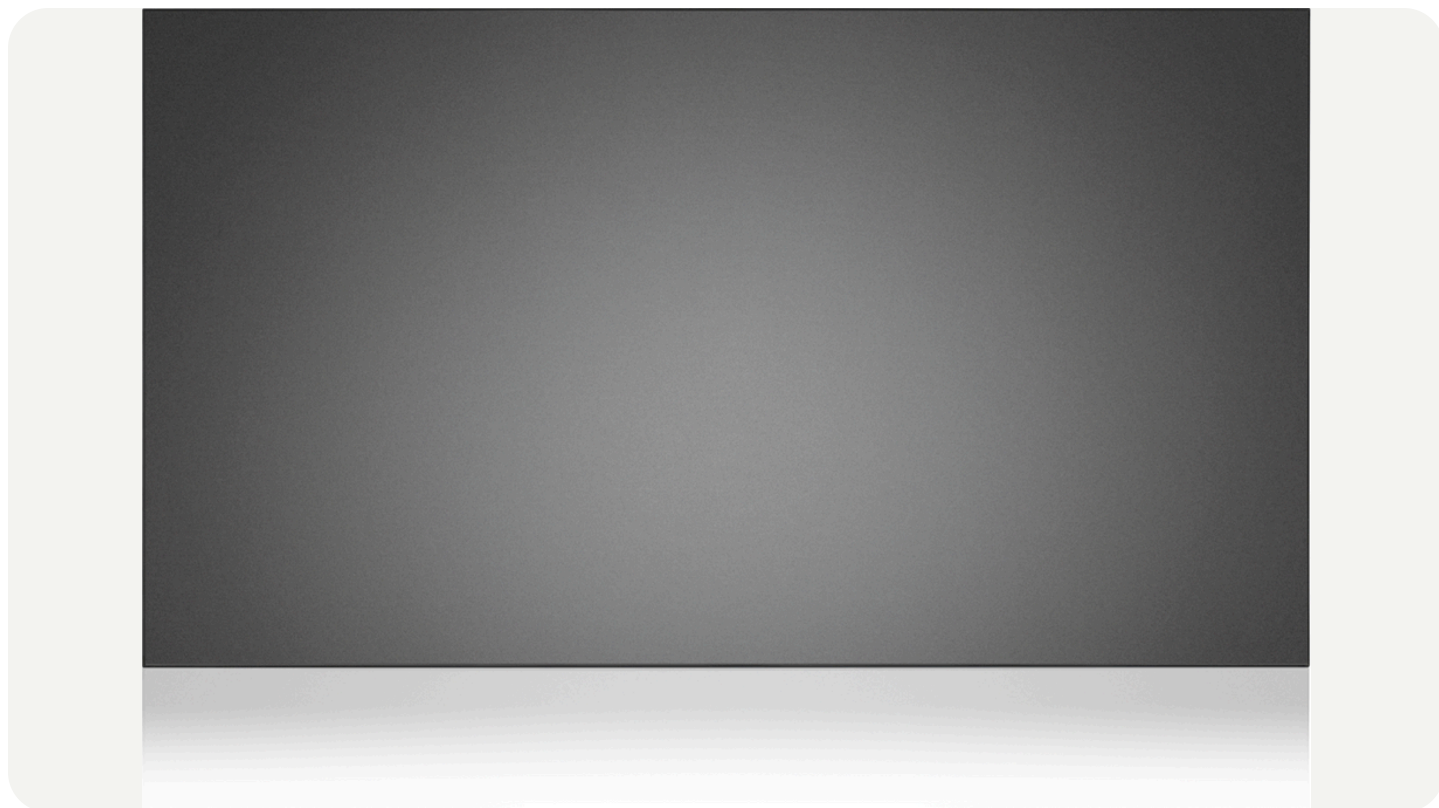

Videovægge, som du kan regne med.

- Nem installation – opsæt dit vægdisplay uden besvær med Auto TileMatrix og kalibreringer ud af boksen. Spar tid ved hjælp af billedforindstillinger, der er klar til brug og beregnet til forhåndsdefinerede billeder.
- Forbedret visning af billeder - avancerede indstillinger af relevante, visuelle parametre giver mulighed for fuld kontrol af lysstyrke, farve, gamma og ensartethed via SpectraView Engine for præcise, realistiske billeder.
- Virkelighedstro og ensartet farve - du kan forvente en farvegengivelse, der minder om det virkelige liv, med IPS-panelteknologien. Takket være S-IPS-panelet opretholdes perfekt synlighed ved ekstreme vinkler.
- Videovægge med sikker pålidelighed og lang levetid – et enestående NEC-varmestyringssystem gør det muligt for brugeren at overvåge og styre varmen inde i displayet.
- Omkostningsbesparende enhedsstyring – spar indsats, mens du administrerer alle tilsluttede NEC-enheder fra en central placering ved at bruge NaViSet Administrator 2-softwareværktøjet.

Specifikationer

Accessories

[AVSpecificationAccessories]	Remote Control Transmitter, Installation Set-Up Manual, Power Cord, HDMI Cable, DisplayPort Cable, Tabletop Stand, Temporary Stand
Shipping Content	Display, DisplayPort Cable, HDMI Cable, LAN Cable (RJ45), Power Cable

Panel Technology	S-IPS with Direct LED backlights
Native Resolution (Pixels)	1920 x 1080
Aspect Ratio	16:9
Backlight Technology	Direct LED
Brightness (cd/m2)	500
Contrast Ratio	1700:1
Response Time (grey to grey avg) ms	8
Pixel Pitch (mm H/V)	0,63
Viewing Angle [°]	178
Active Screen Area (H/V) mm	1209.63 x 680.34

Power Consumption (W) (Operating MAX)	420
Operating Temperature (oC)	0 - 40
Storage Temperature [°C]	-20 - 60
Storage Humidity [%]	10
Storage Humidity [%]	90

DisplayPort	1
HDMI	1
[AVSpecificationConnectivityOutputAudio35MmJack]	1

Colour Versions	Black Front Bezel, Black Back Cabinet
-----------------	---------------------------------------

Operating Humidity (min) [%]	20
Operating Humidity (max) [%]	80

Product Weight Without Stand (Kg)	26
-----------------------------------	----

Special Characteristics

24/7 Operation Certified	True
Limited Manufacturer's Warranty (yrs.)	3
Computer Input - Plug and Play	True
Equipment Space (Mounting)	True
Cabinet Colour	Black
Temperature Sensor	True
Residual Image Reduction Feature	True

Composite	1
DisplayPort	2
DVI-D	1
HDMI	2
Audio 3.5mm Jack	2
VGA	1

Landscape	True
Portrait	True
Mounting (VESA/Number of Points/Pitch mm)	400 x 400 (FDMI)
Mounting (VESA/Number of Points/Pitch mm)	4
Mounting Screw Specification (Size/Max Length)	M6

RS232C IN	1
LAN Port	2
USB	5

Diagonal Size (inches / cm)	55
Diagonal Size (inches / cm)	139

Energy Star	True
-------------	------

Haze Level [%]	28
----------------	----

