


Digital Signage

NEC MULTISYNC MA551

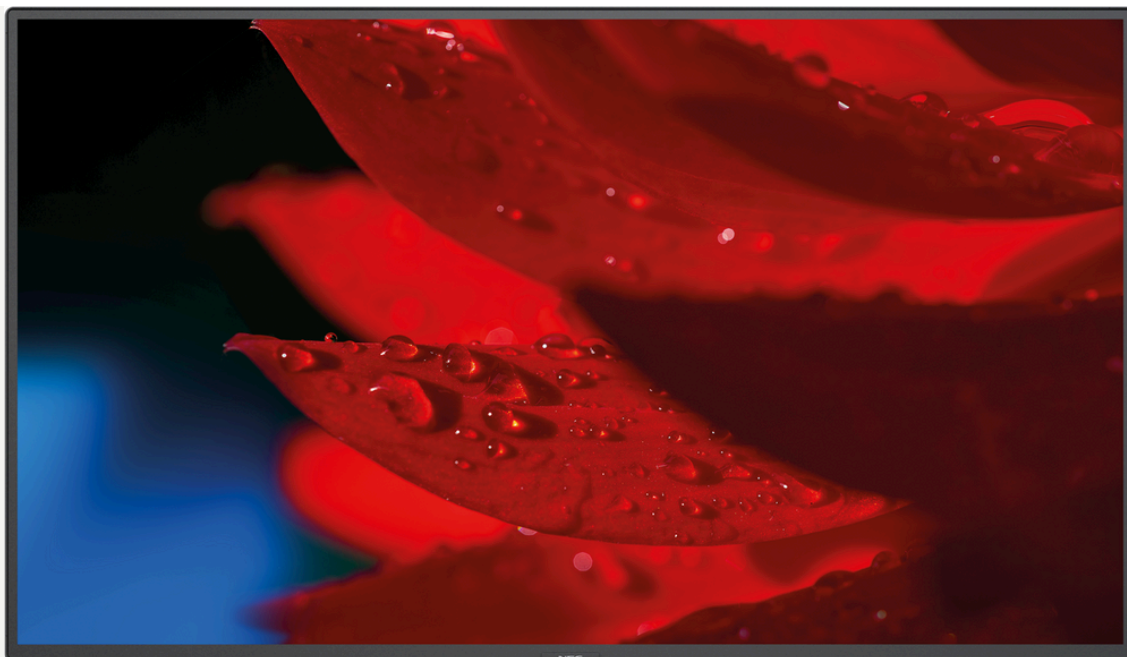

Grundigt kraftfuld skiltning.

- Uhindret læsbarhed – ingen genspejling fra vinduer eller andre lyskilder betyder, at skiltens indhold eller præsentationen i mødelokalet hele tiden er synlige.
- Stort farveområde – den højtydende panelteknologi leverer et bredt udvalg af farver for at sikre en udsøgt visuel oplevelse.
- Sikker på offentlige steder – takket være en metalafdækning bagtil og intelligent varmestyring er den sikker at anvende på offentlige steder, hvor der er krav om brandbeskyttelse.
- Forbedret visning af billeder - avancerede indstillinger af relevante, visuelle parametre giver mulighed for fuld kontrol af lysstyrke, farve, gamma og ensartethed via SpectraView Engine for præcise,
- Missionskritisk, klar til drift 24/7 – valget af industrielle komponenter og omhyggeligt design fokuseret på svære anvendelsesscenarier går hånd i hånd med en imponerende og uafbrudt brugeroplevelse.

Specifikationer

Accessories

| | |
|------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| [AVSpecificationAccessories] | Remote Control Transmitter, Installation Set-Up Manual, AC Adapter, Power Cord, Brightness Sensor, HDMI Cable, Mounting Bracket, Tabletop Stand, Trolley Stand |
| Shipping Content | 2 x AAA batteries, Display, HDMI Cable, Power Cable, Remote Control, Setup Manual |
| Panel Technology | IPS with Edge LED backlights |
| Native Resolution (Pixels) | 3840 x 2160 |
| Aspect Ratio | 16:9 |
| Brightness (cd/m2) | 500 |
| Contrast Ratio | 8000:1 |
| Response Time (grey to grey avg) ms | 8 |
| Viewing Angle [°] | 178 |
| Colour Depth [bn] | 1073 (10bit) |
| Landscape | True |
| Portrait | True |
| Horizontal | True |
| Mounting (VESA/Number of Points/Pitch mm) | 300 x 300 (FDMI) |
| Mounting (VESA/Number of Points/Pitch mm) | 4 |
| Mounting Screw Specification (Size/Max Length) | M6 |
| DisplayPort | 2 |
| HDMI | 2 |
| Audio 3.5mm Jack | 1 |
| RS232C IN | 1 |
| LAN Port | 1 |
| USB | 3 |
| Diagonal Size (inches / cm) | 55 |
| Diagonal Size (inches / cm) | 139 |
| Operating Humidity (min) [%] | 20 |
| Operating Humidity (max) [%] | 80 |

| | |
|--------------------------------------------------|------------------------------------------------------------------------------|
| Special Characteristics | Frame Comp, Powered USB Port (10 W), Removable Logo, Powered USB Port (15 W) |
| 24/7 Operation Certified | True |
| Limited Manufacturer's Warranty (yrs.) | 3 |
| Local Dimming | True |
| Power Management | True |
| Equipment Space (Mounting) | True |
| Cabinet Colour | Black |
| Temperature Sensor | True |
| Brightness Sensor | True |
| IP Rating | True |
| Picture in Picture Mode | True |
| Picture by Picture Mode | True |
| Scheduler / Timer | True |
| Remote Management | True |
| Operating Voltage(ACV) / Frequency(Hz) | 100-240 |
| Operating Voltage(ACV) / Frequency(Hz) | 50-60 |
| Power Consumption (W) (Operating MAX) | 90 |
| Operating Temperature (oC) | 0 - 40 |
| Storage Temperature [°C] | -20 - 60 |
| Storage Humidity [%] | 10 |
| Storage Humidity [%] | 90 |
| Shipping Carton Dimensions (W/H/D) mm | 1430 |
| Shipping Carton Dimensions (W/H/D) mm | 920 |
| Shipping Carton Dimensions (W/H/D) mm | 250 |
| Product Weight Without Stand (Kg) | 28 |
| Shipping Weight (Kg) | 38 |
| DisplayPort | 1 |
| HDMI | 1 |
| [AVSpecificationConnectivityOutputAudio35MmJack] | 1 |
| Bezel Size (L/R) mm | 13 |
| Bezel Size (U) mm | 12 |
| Bezel Size (L) mm | 16 |
| Energy Star | True |
| Haze Level [%] | 28 |

