


Digital Signage

SHARP/ NEC MULTISYNC M981

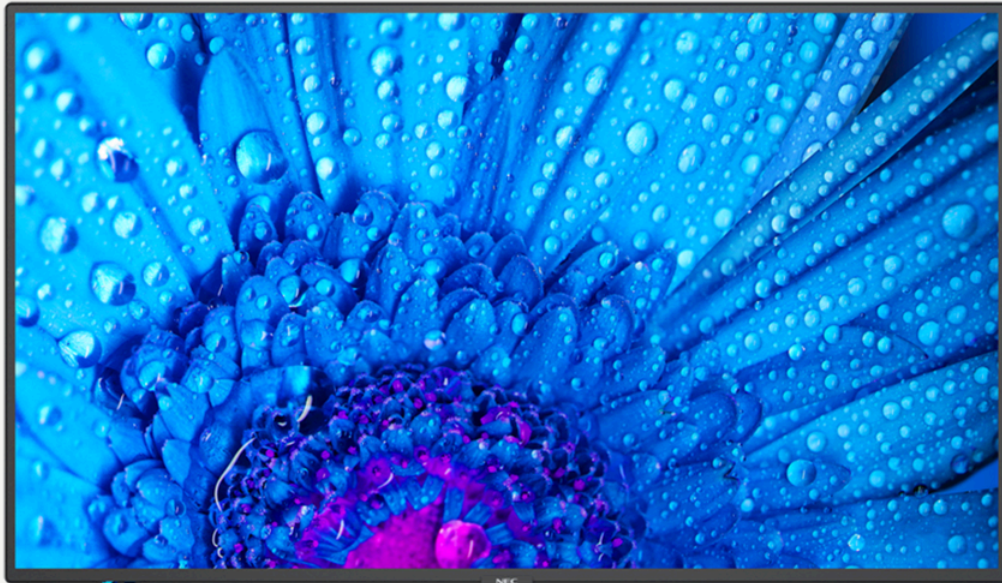

Med et slankt, moderne design, 24/7-betjening og høj uklarhed panel er MultiSync M981 den perfekte pasform til dine reklame-, infotainment- og mødelokalebehov.

- Uhindret læsbarhed – ingen refleksioner fra vinduer eller andre lyskilder betyder ingen forstyrrelse af synligheden af skilteindhold eller mødelokalepræsentation.
- Forbedret billedbehandling - avancerede indstillinger af relevante visuelle parametre giver fuld kontrol over lysstyrke, farve, gamma og ensartethed via SpectraView Engine for præcise, naturlige bille
- Missionskritisk 24/7 klar drift – valget af komponenter i industriel kvalitet og omhyggeligt design fokuseret på krævende brugsscenarier
- ledsager en imponerende og kontinuerlig seeroplevelse.
- Future Ready Connectivity – med flere industristandard digitale og analoge signalindgange til fleksibel integration i AV-infrastrukturer.
- Sikker fjernstyring – fjernstyr dine enheder på en sikker måde ved hjælp af NEC NaviSet Administrator 2; administrere vedligeholdelseskrav proaktivt, hvilket sparer tid og ressourcer.

Specifikationer

Accessories

[AVSpecificationAccessories]	Remote Control Transmitter, Installation Set-Up Manual, Power Cord, HDMI Cable, Mounting Bracket, Tabletop Stand, Trolley Stand
Shipping Content	2 x AAA batteries, Display, HDMI Cable, Power Cable, Remote Control, Setup Manual

Panel Technology	IPS with Direct LED backlights
Native Resolution (Pixels)	3840 x 2160
Aspect Ratio	16:9
Backlight Technology	LED
Brightness (cd/m2)	500
Contrast Ratio	8000:1
Response Time (grey to grey avg) ms	8
Viewing Angle [°]	178
Colour Depth [bn]	1073 (10bit)

Shipping Carton Dimensions (W/H/D) mm	2350
Shipping Carton Dimensions (W/H/D) mm	1400
Shipping Carton Dimensions (W/H/D) mm	310
Product Weight Without Stand (Kg)	67
Shipping Weight (Kg)	99

DisplayPort	3
HDMI	4
Audio 3.5mm Jack	1

RS232C IN	1
LAN Port	2
USB	3

Diagonal Size (inches / cm)	98
Diagonal Size (inches / cm)	249

Operating Humidity (min) [%]	20
Operating Humidity (max) [%]	80

Special Characteristics	Frame Comp, Powered USB Port (10 W), Removable Logo, Powered USB Port (15 W)
24/7 Operation Certified	True
Limited Manufacturer's Warranty (yrs.)	3
Local Dimming	True
Built in Speakers (W)	10 + 10
Power Management	True
Cabinet Colour	Black
Temperature Sensor	True
Brightness Sensor	True
Picture in Picture Mode	True
Scheduler / Timer	True
Remote Management	True
SNMP	True

Operating Voltage(ACV) / Frequency(Hz)	100-240
Operating Voltage(ACV) / Frequency(Hz)	50-60
Power Consumption (W) (Operating MAX)	340
Operating Temperature (oC)	0 - 40
Storage Temperature [°C]	-20 - 60
Storage Humidity [%]	10
Storage Humidity [%]	80

Landscape	True
Portrait	True
Mounting (VESA/Number of Points/Pitch mm)	600 x 400 (FDMI)
Mounting (VESA/Number of Points/Pitch mm)	4
Mounting Screw Specification (Size/Max Length)	M8

DisplayPort	1
HDMI	1
[AVSpecificationConnectivityOutputAudio35MmJack]1	

Bezel Size (L/R) mm	14
Bezel Size (U) mm	14
Bezel Size (L) mm	15

Energy Star	True
-------------	------

Haze Level [%]	Pro 28
----------------	--------

