


Digital Signage

PN-HS551

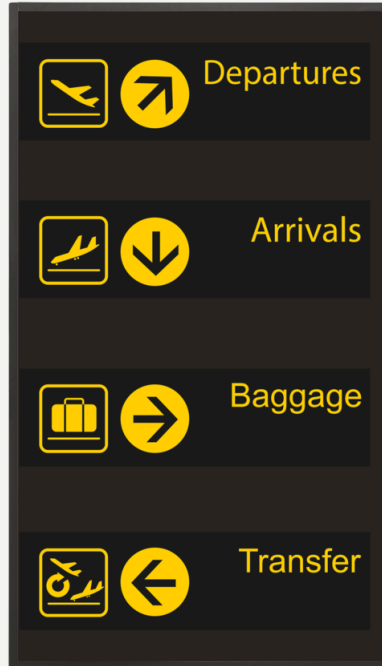

The new professional PN-HS431 UHD large format digital signage which can be easily used transport, retail and corporate applications. The 700 cd/m² is good for bright environments and the monitor can run around the clock 24/7.

- Make an impact with the 55 display in your retail, corporate or transport environments
- Showcase images and video in detail with 4K Ultra HD resolution (3840 x 2160 pixels)
- Enhanced and true representation of colour shown from wide colour gamut
- Continuous display of content during operating hours 24/7
- Show and hear content easily with integrated 4K USB media player and speakers
- Latest HDMI Connectivity for 4K at 60Hz
- 50.000h backlite lifetime (portrait/landscape 25°C)
- Flexible installation in portrait, landscape and face-up/-down (360°)

Specifikationer

Accessories

[AVSpecificationAccessories]	Remote Control Transmitter, Operation Manual, Installation Set-Up Manual, CD Rom, Power Cord, Battery, Cable Clamp, Portrait Mount Sticker Kit
Panel Technology	TFT-LCD
Native Resolution (Pixels)	3840 x 2160
Aspect Ratio	16:9
Backlight Technology	W-LED / Full Array
Brightness (cd/m2)	700
Contrast Ratio	5000:1
Display Colours	1060
Response Time (grey to grey avg) ms	8
Pixel Pitch (mm H/V)	0,315
Viewing Angle [°]	178
Active Screen Area (H/V) mm	1209 x 680
Operating Voltage(ACV) / Frequency(Hz)	100-240
Operating Voltage(ACV) / Frequency(Hz)	50-60
Operating Voltage(DCV)	190
Power Consumption (W) (Standby)	50
Operating Temperature (oC)	0 - 40
HDMI	3
Audio 3.5mm Jack	1
VGA	1
Bezel Size (L/R) mm	14
Bezel Size (U) mm	14
Bezel Size (L) mm	14
Operating Humidity (min) [%]	20
Operating Humidity (max) [%]	80
CE, CB Report	True
Haze Level [%]	25

24/7 Operation Certified	True
Built in Speakers (W)	10 + 10
Computer Input - Plug and Play	True
Power Management	True
Cabinet Colour	Black
Fanless	True
Temperature Sensor	True
Residual Image Reduction Feature	True
Multi-Screen Function - Videowall Mode (Enlarge Feature)	True
Multi Language OSD	True
Scheduler / Timer	True
Remote Management	True
Adjustment Lock Feature	True
Displaying Use Time Feature	True
Screen Adjustment	True
Colour Temperature Adjustment	True
Gamma Adjustment	True
Self-Adjust	True
Hardware Diagnosis	True
Monitor Control Software Support	True
Temperature Control	True
Landscape	True
Portrait	True
Horizontal	True
Mounting (VESA/Number of Points/Pitch mm)	400 x 400
Mounting Screw Specification (Size/Max Length)	M6
RS232C IN	1
LAN Port	1
USB	1
Diagonal Size (inches / cm)	55
Diagonal Size (inches / cm)	138
Audio RCA R-L	1
Product Weight Without Stand (Kg)	18

