


Interaktiv skærm

Sharp/ NEC MultiSync® M751 IGB

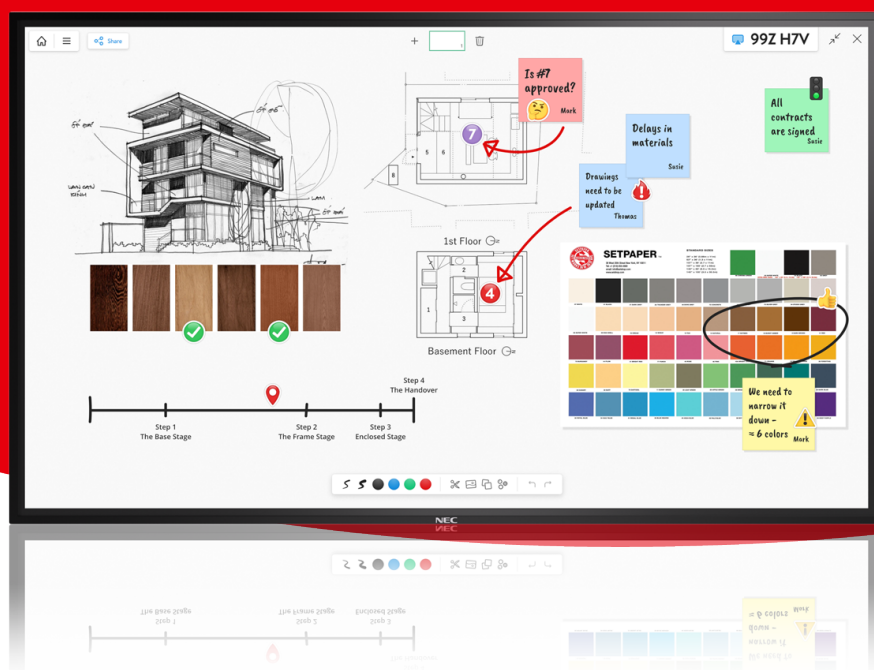

- Klassens bedste visuelle ydeevne – drage fordel af en "pixelfri" visuel ydeevne i Ultra-High Definition (UHD).
- NEC Open Modular Intelligence (OMI) slot-in-teknologi – vælg skalerbar computerkraft med Raspberry Pi Compute Module 4 eller Intel® Smart Display Modules (Intel®SDM) til skræddersyede løsninger.
- Bliv mere produktiv – få et års gratis licens til FlatFrog Board for Rooms! FlatFrog Board whiteboard-software gør hybrid arbejde nemt og lige produktivt for alle.
- Naturlig skriveoplevelse – Uanset om du bruger finger eller pen, giver InGlass™-berøringsteknologien sømløs interaktiv berøringsydeevne, inklusive Windows Ink og håndfladeafvisning.
- Missionskritisk 24/7 klar drift – valget af komponenter i industriel kvalitet og omhyggeligt design fokuseret på krævende brugsscenarier ledsager en imponerende og kontinuerlig seeroplevelse.

Specifikationer

DISPLAY MODULE DATA

Panel Technology	ADS with Direct LED backlights
Native Resolution (Pixels)	3840 x 2160
Diagonal Size (inches / cm)	75 / 189.3
Aspect Ratio	16:9
Backlight Technology	LED
Brightness (cd/m2)	500
Contrast Ratio	≥ 8000:1
Response Time (grey to grey avg) ms	8
Viewing Angle (H/V) 0 CR >10	178 / 178
Colour Depth [bn]	1.073 (10bit)

TOUCH INTERFACE SPECIFICATION

Technology	InGlass™
Number of Touch Points	20
Coating / Filter	Anti-glare coating
Screen Hardness (H)	7
Operating System Compatibility	Native Multi-Touch: Windows 7, Windows 8, Windows 10, Linux, Android; Default Mouse: Windows XP, Windows Vista, Mac OS X
Thickness [mm]	3
Haze Level [%]	Pro (25)
Touch Method	Finger; Gloves; Stylus (≥ 2 mm)
Data Interface	USB-HID
Accuracy [mm]	< 1
Palm Rejection	Yes
Windows Ink	Yes

WEIGHTS AND MEASURES

Bezel Size (L/R) mm	21.9
Bezel Size (U/L) mm	21.9
Product Dimensions (W/H/D) mm	1,724.6 x 1,003 x 93.4
Product Weight Without Stand (Kg)	62

CONNECTIVITY (AUDIO/VIDEO) INPUT

HDMI	4
DisplayPort	3
Audio 3.5mm Jack	1

CONNECTIVITY (CONTROL/SERIAL DATA)

RS232C IN	1
LAN Port	2
USB	3

KEY SPECIFICATIONS

Special Characteristics	DICOM Simulation; HDMI ARC; Powered USB Port (10 W)
Operating Time	24 / 7
24/7 Operation Certified	•
Local Dimming	•
Built in Speakers (W)	10 W + 10 W
Power Management	•

POWER SUPPLY AND OPERATING ENVIRONMENT

Operating Voltage(ACV) / Frequency(Hz)	100-240; 50 / 60
Power Consumption (W) (Operating MAX)	205
Operating Temperature (oC)	+0 to +35
Humidity (%)	20 to 80
Power Savings Mode [W]	< 0.5 (ECO Standby); < 2 (Networked Standby)

INSTALLATION

Landscape	•
Portrait	•
Mounting (VESA/Number of Points/Pitch mm)	4; 600 x 400

CONNECTIVITY (AUDIO/VIDEO) OUTPUT

HDMI	1
DisplayPort	1
Audio/Headphone 3.5mm Jack	1

ACCESSORIES

Shipping Contents	2 x Passive Stylus; 2x AAA batteries; Display; HDMI Cable; Power Cable; Remote Control; Setup Manual; USB cable
-------------------	---

