


Digital Signage

# SHARP/ NEC MULTISYNC M491 AIRSERVER

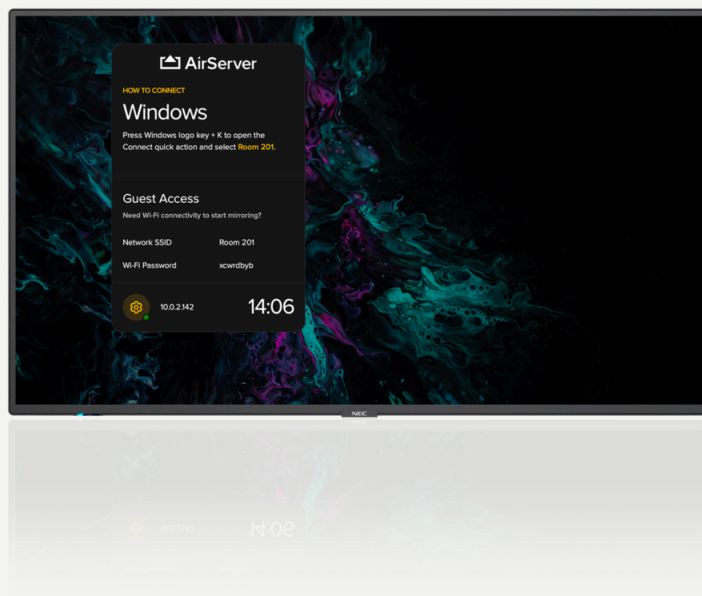

MultiSync AirServer-modellerne er perfekte til mødelokaler og mødelokaler og giver en slank kombination af intuitiv skærmdeling med professionel skærmt teknologi, hvilket understøtter ubesværet samarbejde.

- Moderne og slankt design – robust, men elegant, hvilket giver mulighed for diskret integration i enhver applikation og miljø.
- Sikker fjernstyring – fjernstyr dine enheder på en sikker måde ved hjælp af NEC NaviSet Administrator 2; administrere vedligeholdelseskrav proaktivt, hvilket sparer tid og ressourcer.
- Uhindret læsbarhed – ingen refleksioner fra vinduer eller andre lyskilder betyder ingen forstyrrelse af synligheden af skilteindhold eller mødelokalepræsentation.
- Missionskritisk 24/7 klar drift – valget af komponenter i industriel kvalitet og omhyggeligt design fokuseret på krævende brugsscenarier ledsager en imponerende og kontinuerlig seeroplevelse.
- Future Ready Connectivity – med flere industristandard digitale og analoge signalindgange til fleksibel integration i AV-infrastrukturer.

# Specifikationer

## Accessories

[AVSpecificationAccessories]	Remote Control Transmitter, Installation Set-Up Manual, Power Cord, HDMI Cable, Mounting Bracket, Tabletop Stand, Trolley Stand, Battery
Shipping Content	2 x AAA batteries, Display, HDMI Cable, Power Cable, Remote Control, Setup Manual
Special Characteristics	Frame Comp, Powered USB Port (10 W), Removable Logo, Powered USB Port (15 W)
24/7 Operation Certified	True
Limited Manufacturer's Warranty (yrs.)	3
Local Dimming	True
Built in Speakers (W)	10 + 10
Power Management	True
Equipment Space (Mounting)	True
Cabinet Colour	Black
Temperature Sensor	True
Brightness Sensor	True
Residual Image Reduction Feature	True
Scheduler / Timer	True
Remote Management	True
Gain Control	True
Operating Voltage(ACV) / Frequency(Hz)	100-240
Operating Voltage(ACV) / Frequency(Hz)	50-60
Power Consumption (W) (Operating MAX)	80
Power Consumption (W) (Standby)	0,5
Operating Temperature (oC)	0 - 40
Storage Temperature [°C]	-20 - 60
Storage Humidity [%]	10
Storage Humidity [%]	90
Shipping Carton Dimensions (W/H/D) mm	1298
Shipping Carton Dimensions (W/H/D) mm	860
Shipping Carton Dimensions (W/H/D) mm	224
Product Weight Without Stand (Kg)	22
Shipping Weight (Kg)	29
DisplayPort	1
HDMI	2
Audio 3.5mm Jack	1
Bezel Size (L/R) mm	13
Bezel Size (U) mm	12
Bezel Size (L) mm	16
Energy Star	True
Haze Level [%]	28

## AirServer Embedded Screen Mirroring Solution

Miracast	Android and Windows, extend Windows 10 desktop, Miracast over infrastructure, screen mirroring, touchback and pen support
Airplay	Code and password, extend macOS display, iOS, iPadOS and macOS, screen mirroring and content sharing
Google Cast	Android, Chrome OS and Google Chrome, prompt security, screen mirroring and cast from apps with DRM
Guest Connectivity	2.4 and 5 GHz channel selection, access control (device only, Internet only or Internet/LAN), Wi-Fi Hotspot, WPA2 security
Video Output	Up to Full HD (1920 x 1080) at 60 fps
No. of Connections	1
Networking	1 x Gigabit LAN, 802.11 ac/b/g/n Wi-Fi, 802.1X security, IPv6 addresses, Proxy
Automatic Updates	Provides new features and security enhancements
Panel Technology	IPS with Direct LED backlights
Native Resolution (Pixels)	3840 x 2160
Aspect Ratio	16:9
Backlight Technology	Edge LED
Brightness (cd/m <sup>2</sup> )	500
Contrast Ratio	8000:1
Response Time (grey to grey avg) ms	8
Viewing Angle [°]	178
Colour Depth [bn]	1076 (10bit)
Landscape	True
Portrait	True
Mounting (VESA/Number of Points/Pitch mm)	300 x 300 (FDMI)
Mounting (VESA/Number of Points/Pitch mm)	4
Mounting Screw Specification (Size/Max Length)	M6
RS232C IN	1
LAN Port	1
USB	1
Diagonal Size (inches / cm)	49
Diagonal Size (inches / cm)	123
Operating Humidity (min) [%]	20
Operating Humidity (max) [%]	80

[AVSpecificationConnectivityOutputAudio35MmJack]1

