


# NEC MultiSync P495

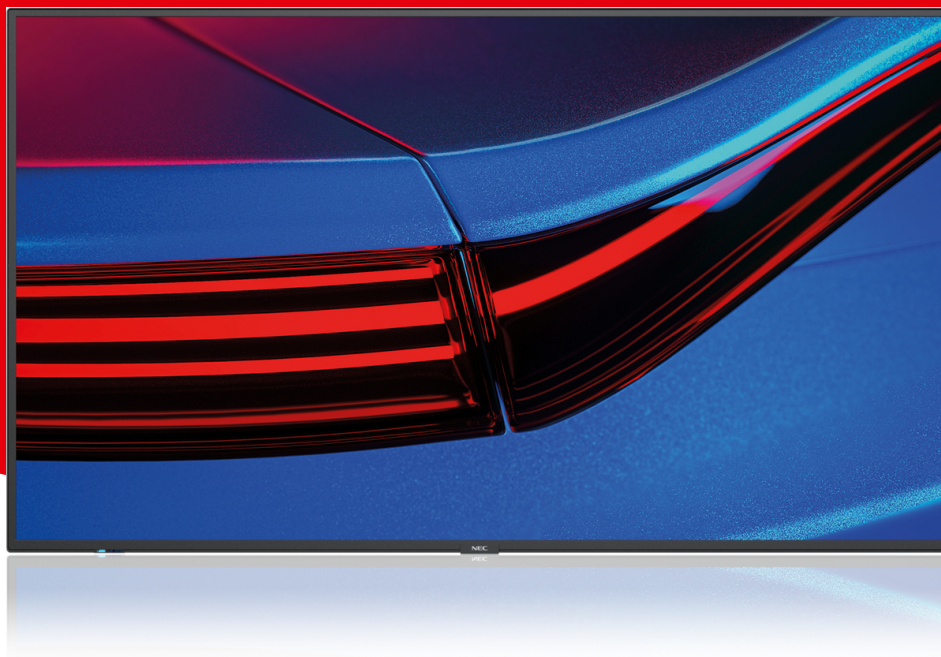

- Sikker fjernstyring – styr dine enheder sikkert på afstand ved hjælp af NEC NaviSet Administrator 2. Administrér vedligeholdelsesbehovene proaktivt, og spar tid og ressourcer.
- Sikker på offentlige steder – takket være en metalafdækning bagtil og intelligent varmestyring er den sikker at anvende på offentlige steder, hvor der er krav om brandbeskyttelse.
- Missionskritisk, klar til drift 24/7 – valget af industrielle komponenter og omhyggeligt design fokuseret på svære anvendelsesscenarier går hånd i hånd med en imponerende og uafbrudt brugeroplevelse.
- Uhindret læsbarhed – ingen genspejling fra vinduer eller andre lyskilder betyder, at skiltens indhold eller præsentationen i mødelokalet hele tiden er synlige.
- Forbedret visning af billeder - avancerede indstillinger af relevante, visuelle parametre giver mulighed for fuld kontrol af lysstyrke, farve, gamma og ensartethed via SpectraView Engine for præcise,

# Specifikationer

## DISPLAY MODULE DATA

Panel Technology	IPS with Edge LED backlights
Native Resolution (Pixels)	3840 x 2160
Diagonal Size (inches / cm)	49 / 124.5
Aspect Ratio	16:9
Brightness (cd/m <sup>2</sup> )	700
Contrast Ratio	≥ 8000:1
Response Time (grey to grey avg) ms	8
Viewing Angle (H/V) @ CR >10	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Colour Depth [bn]	1.073 (10bit)
Haze Level [%]	28

## POWER SUPPLY AND OPERATING ENVIRONMENT

Operating Voltage(ACV) / Frequency(Hz)	100-240 V AC; 50 / 60 Hz
Power Consumption (W) (Operating MAX)	105 shipping
Operating Temperature (°C)	0 to 40
Storage Temperature [°C]	-20 to 60
Humidity (%)	20 to 80
Storage Humidity [%]	10 to 90

## INSTALLATION

Landscape	•
Portrait	•
Horizontal	•
Mounting (VESA/Number of Points/Pitch mm)	4; 300 x 300 (FDMI)

## CONNECTIVITY (AUDIO/VIDEO) OUTPUT

HDMI	1
DisplayPort	1
Audio/Headphone 3.5mm Jack	1

## ACCESSORIES

Shipping Content	2x AAA batteries; Display; HDMI Cable; Power Cable; Remote Control; Setup Manual
Remote Control Transmitter	Yes
Power Cord	Yes
Mounting Bracket	Optional
Tabletop Stand	Optional

## KEY SPECIFICATIONS

Special Characteristics	DICOM Simulation; HDMI ARC; Powered USB Port (10 W); Removable Logo
24/7 Operation Certified	•
Limited Manufacturer's Warranty (yrs.)	3
Local Dimming	•
Power Management	•
Cabinet Colour	Black
Temperature Sensor	•
Brightness Sensor	•

## WEIGHTS AND MEASURES

Bezel Size (L/R) mm	12.5
Bezel Size (U/L) mm	12 / 15.6
Product Dimensions (W/H/D) mm	1,103.4 x 636.2 x 61.1
Shipping Carton Dimensions (W/H/D) mm	1,298 x 860 x 224
Product Weight Without Stand (Kg)	22.9
Shipping Weight (Kg)	29.8

## CONNECTIVITY (AUDIO/VIDEO) INPUT

HDMI	2
DisplayPort	2
Audio 3.5mm Jack	1

## CONNECTIVITY (CONTROL/SERIAL DATA)

RS232C IN	1
LAN Port	1
USB	3

