


Interactive Display

# NEC MultiSync M491 PCAP

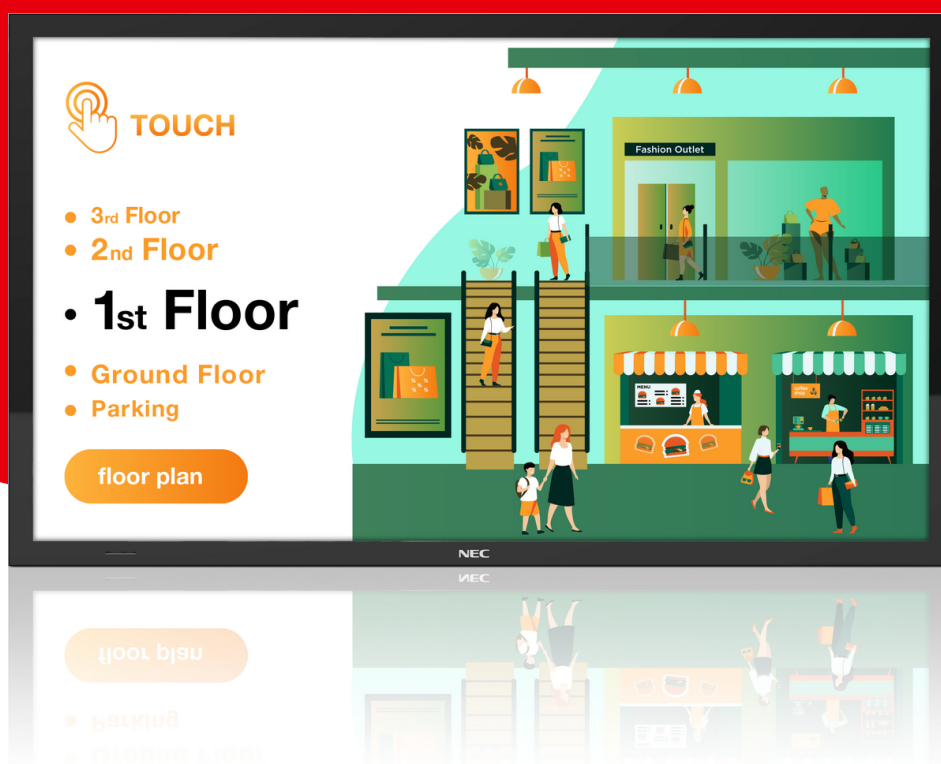

- Moderne og rengøringsvenligt design – kant til kant med mulighed for diskret integration i hvilken som helst anvendelse og alle miljøer.
- Uhindret læsbarhed – ingen genspejling fra vinduer eller andre lyskilder betyder, at skiltens indhold eller præsentationen i mødelokalet hele tiden er synlige.
- Sikker fjernstyring – styr dine enheder sikkert på afstand ved hjælp af NEC NaviSet Administrator 2. Administrér vedligeholdelsesbehovene proaktivt, og spar tid og ressourcer.
- Enestående touch-præstationer – med op til 20 touch-punkter byder PCAP-teknologien på fremragende touch-respons og anvendelse af penne.
- Missionskritisk, klar til drift 24/7 – valget af industrielle komponenter og omhyggeligt design fokuseret på svære anvendelsesscenarier går hånd i hånd med en imponerende og uafbrudt brugeroplevelse.

# Specifikationer

## DISPLAY MODULE DATA

Panel Technology	IPS with Edge LED backlights
Native Resolution (Pixels)	3840 x 2160
Diagonal Size (inches / cm)	49 / 123.2
Aspect Ratio	16:9
Backlight Technology	LED
Brightness (cd/m2)	500
Contrast Ratio	> 8000:1
Response Time (grey to grey avg) ms	8
Viewing Angle (H/V)0 CR >10	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Colour Depth [bn]	1,076 (10bit)

## TOUCH INTERFACE SPECIFICATION

Technology	PCAP
Number of Touch Points	20
Coating / Filter	Anti-glare
Screen Hardness (H)	6
Operating System Compatibility	Android; Linux; Raspberry Pi; Windows
Light Transmission [%]	85 (+ / - 5 %)
Haze Level [%]	5 ~ 10
Touch Method	Conductive Passive Stylus; Finger
Data Interface	USB-HID
Palm Rejection	No
Windows Ink	No

## WEIGHTS AND MEASURES

Bezel Size (L/R) mm	Edge-to-edge flush design (no bezel)
Bezel Size (U/L) mm	Edge-to-edge flush design (no bezel)
Product Dimensions (W/H/D) mm	1,139.9 x 669.9 x 65.08
Product Weight Without Stand (Kg)	30.3

## CONNECTIVITY (AUDIO/VIDEO) INPUT

HDMI	2
DisplayPort	1
Audio 3.5mm Jack	1

## CONNECTIVITY (CONTROL/SERIAL DATA)

RS232C IN	1
LAN Port	1
USB	1

## KEY SPECIFICATIONS

Special Characteristics	HDMI ARC; Powered USB Port (10 W)
Built in Speakers (W)	10 + 10
Power Management	•

## POWER SUPPLY AND OPERATING ENVIRONMENT

Operating Voltage(ACV) / Frequency(Hz)	100-240 V AC; 50 / 60 Hz
Power Consumption (W) (Operating MAX)	80 shipping
Operating Temperature (oC)	0 to 35
Humidity (%)	20-80

## INSTALLATION

Landscape	•
Portrait	•
Horizontal	•
Mounting (VESA/Number of Points/Pitch mm)	4; 300 x 300 (FDMI)

## CONNECTIVITY (AUDIO/VIDEO) OUTPUT

Audio/Headphone 3.5mm Jack	1
----------------------------	---

## ACCESSORIES

Pen	Optional
Shipping Contents	2x AAA batteries; Display; HDMI Cable; Power Cable; Remote Control; Setup Manual; USB cable

