


Digital Signage Display

Sharp/ NEC MultiSync M551 AirServer

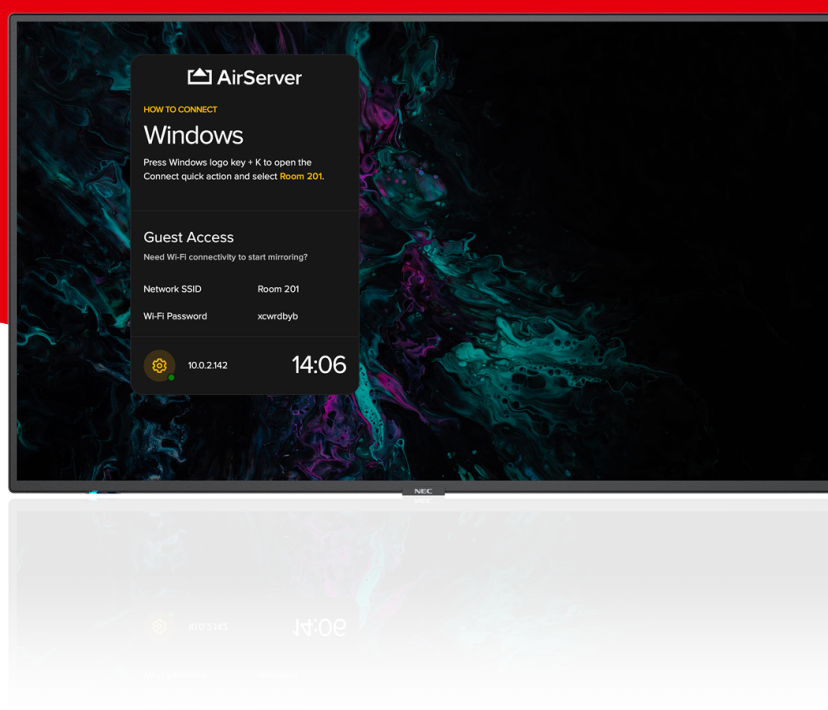

- Moderne og slankt design – robust, men elegant, hvilket giver mulighed for diskret integration i enhver applikation og miljø.
- Uhindret læsbarhed – ingen refleksioner fra vinduer eller andre lyskilder betyder ingen forstyrrelse af synligheden af skilteindhold eller mødelokalepræsentation.
- Future Ready Connectivity – med flere industristandard digitale og analoge signalindgange til fleksibel integration i AV-infrastrukturer.
- Sikker fjernstyring – fjernstyr dine enheder på en sikker måde ved hjælp af NEC NaviSet Administrator 2; administrere vedligeholdelseskrav proaktivt, hvilket sparer tid og ressourcer.
- Uhindret læsbarhed – ingen refleksioner fra vinduer eller andre lyskilder betyder ingen forstyrrelse af synligheden af skilteindhold eller mødelokalepræsentation.

Specifikationer

DISPLAY MODULE DATA

Panel Technology	IPS with Edge LED backlights
Native Resolution (Pixels)	3840 x 2160
Diagonal Size (inches / cm)	55 / 138.8
Aspect Ratio	16:9
Backlight Technology	Edge LED
Brightness (cd/m2)	500
Contrast Ratio	≥ 8000:1
Response Time (grey to grey avg) ms	8
Viewing Angle (H/V) 0 CR >10	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Colour Depth [bn]	1.076 (10bit)
Haze Level [%]	28

POWER SUPPLY AND OPERATING ENVIRONMENT

Operating Voltage(ACV) / Frequency(Hz)	100-240 V AC; 50 / 60 Hz
Power Consumption (W) (Operating MAX)	110 shipping
Operating Temperature (oC)	0 to 40
Storage Temperature [°C]	-20 to 60
Humidity (%)	20 to 80
Storage Humidity [%]	10 to 90

INSTALLATION

Landscape	•
Portrait	•
Mounting (VESA/Number of Points/Pitch mm)	4; 300 x 300 (FDMI)

CONNECTIVITY (AUDIO/VIDEO) OUTPUT

Audio/Headphone 3.5mm Jack	1
----------------------------	---

AIRSERVER EMBEDDED SCREEN MIRRORING SOLUTION

Airplay	Code and password; extend macOS display; iOS, iPadOS and macOS; screen mirroring and content sharing
Google Cast	Android, Chrome OS and Google Chrome; prompt security; screen mirroring and cast from apps with DRM
Miracast	Android and Windows; extend Windows 10 desktop; Miracast over infrastructure; screen mirroring; touchback and pen support
Guest Connectivity	2.4 and 5 GHz channel selection; access control (device only, Internet only or Internet / LAN; Wi-Fi Hotspot; WPA2 security
Video Output	Up to Full HD (1920 x 1080) at 60 fps
No. of Connections	1
Networking	1 x Gigabit LAN; 802.11 ac / b / g / n Wi-Fi; 802.1X security; IPv6 addresses; Proxy
Automatic Updates	Provides new features and security enhancements

KEY SPECIFICATIONS

Special Characteristics	DICOM Simulation; HDMI ARC; Powered USB Port (10 W); Removable Logo
24/7 Operation Certified	•
Limited Manufacturer's Warranty (yrs.)	3
Local Dimming	•
Built in Speakers (W)	10W + 10W
Power Management	•
Cabinet Colour	Black
Temperature Sensor	•
Brightness Sensor	•

WEIGHTS AND MEASURES

Bezel Size (L/R) mm	12.5
Bezel Size (U/L) mm	12 / 15.6
Product Dimensions (W/H/D) mm	1,239.6 x 713 x 61.1
Shipping Carton Dimensions (W/H/D) mm	1,430 x 920 x 250
Product Weight Without Stand (Kg)	26.4
Shipping Weight (Kg)	36.47

CONNECTIVITY (AUDIO/VIDEO) INPUT

HDMI	2
DisplayPort	1
Audio 3.5mm Jack	1

CONNECTIVITY (CONTROL/SERIAL DATA)

RS232C IN	1
LAN Port	1
USB	1

ACCESSORIES

Shipping Content	2x AAA batteries; Display; HDMI Cable; Power Cable; Remote Control; Setup Manual
Remote Control Transmitter	Yes
Power Cord	Yes
Mounting Bracket	Optional
Tabletop Stand	Optional
Battery	Yes

