

A3 farve laserprinter med scanner

# MX-8081


Ease of use meets professional productivity



- Fast 80ppm speed in colour and black & white with a maximum paper capacity of 8500 sheets
- Wide variety of finishing options, including saddle stitch finishing, manual stapling, and stapleless stapling
- Easy UI mode on tiltable 10.1-inch colour LCD touchscreen
- 300-sheet DSPF with double-feed detection scans documents at 240 ipm\* and handles paper up to 220 gsm thick
- Accommodates standard paper sizes up to SRA3/A3 wide (13" x 19"), custom sizes up to 330 x 488 mm (13" x 19.2"), and paper thicknesses up to 300 gsm
- Industry-leading, advanced security solutions for ultimate system/data protection and access control, including firmware self-recovery
- Embedded Fiery® Print Server for job and workflow management in busy on-demand environment
- Print Release function enables printout from any compatible networked MFP\*\*
- Superior image quality with Developer Refresh System
- Sharp OSA (Open Systems Architecture) allows integration with network and cloud-based applications (option)
- Application Portal\*\*\* offers apps for downloading and installing onto MFP
- Easy access to public cloud services via single sign-on (option)


\*Originals per minute; when feeding A4 (8 1/2" x 11") sheets. \*\*Contact a Sharp customer representative for details on the recommended maximum number of connectable MFPs. \*\*\*Contact a Sharp customer representative for details.

# Konfiguration

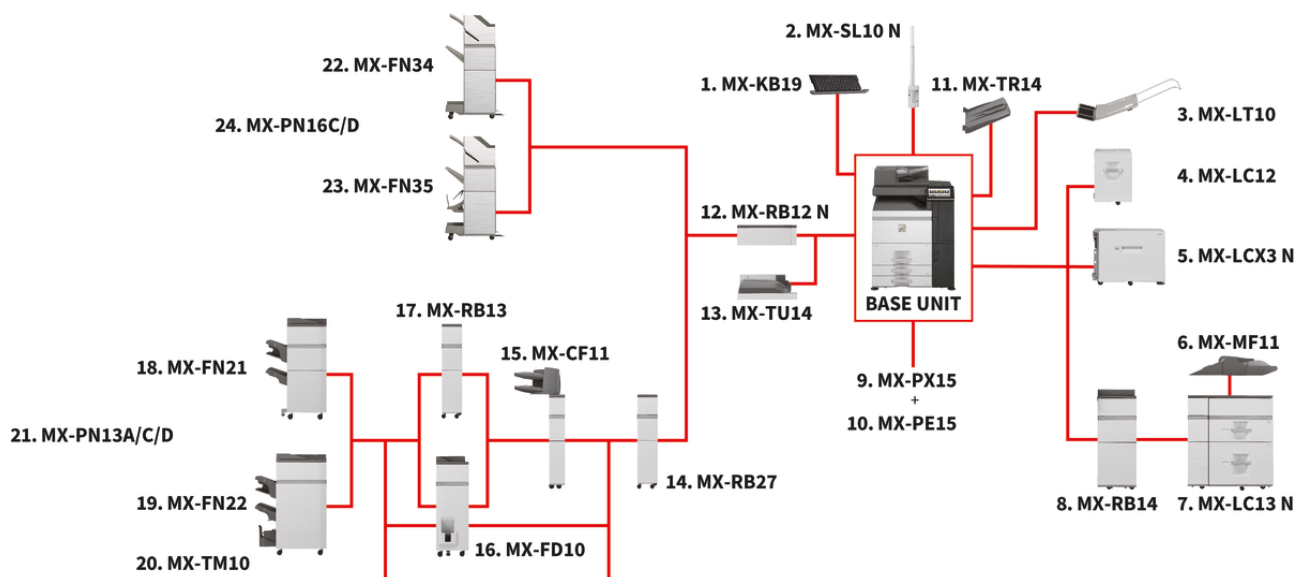

Konfigurationer kan variere pr. Salgsregion. Kontakt din lokale Sharp-repræsentant for yderligere information.

# Dimensioner

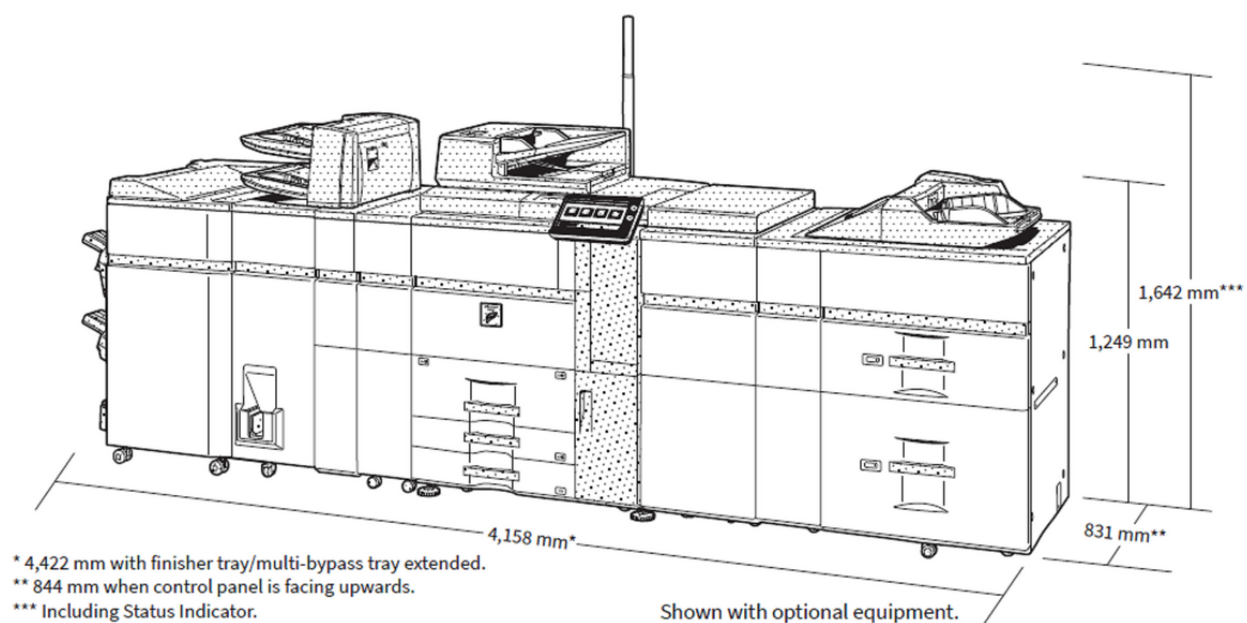

Målene vises med ekstraudstyr. Indstillingerne kan variere pr. Region.

# Options

## Base Unit

### 1. MX-KB19 Keyboard

### 2. MX-SL10 N Status Indicator

### 3. MX-LT10 Long Tray Feeding Unit

Recommended for banner printing

### 4. MX-LC12 Large Capacity Tray (A4)

A4 - B5, 3,500 sheets (80g/m2)

Cannot be installed with MX-LCX3 N or MX-LC13.

### 5. MX-LCX3 N Large Capacity Tray (A3)

A3 - A4R (also supports 13" x 19.2"), 3,000 sheets (80g/m2)

Cannot be installed with MX-LC12 or MX-LC13.

### 6. MX-MF11 Multi Bypass Tray (for MX-LC13)

SRA3 - A5R (also supports 13" x 19.2"), 500 sheets (80g/m2)

### 7. MX-LC13 N Large Capacity Trays (A3)

A3 - A4R (also supports 13" x 19.2"), 5,000 sheets (80g/m2)

Requires MX-RB14. Cannot be installed with MX-LC12 or MX-LCX3N.

### 8. MX-RB14 Paper Pass Unit Between main unit and MX-LC13N

Requires if MX-LC13N is installed.

### 9. MX-PE15 Fiery Server Requires MX-PX15 Interface Kit

### 10. MX-PX15 Interface Kit. Requires MX-PE15 Fiery Server

## Faxing

### MX-FWX1 Internet-Fax Expansion Kit

### MX-FX15 Fax Expansion Kit

## Finishing

### 11. MX-TR14 Exit Tray Unit

Cannot be installed with MX-RB14, MX-LC13 N and MX-MF11.

### 12. MX-RB12 N Paper Pass Unit (main machine)

Requires if MX-TU14 is not installed.

### 13. MX-TU14 Exit Tray Cabinet

Required if MX-RB12 is not installed.

### 14. MX-RB27 Curl Correction Unit

Corrects paper curling by putting pressure on the convex/concave curl.

Required if MX-FN21 or MX-FN22 is installed.

### 15. MX-CF11 Inserter (200-sheet x 2 bin)

SRA3 - A5R, 200 sheets each (80g/m2).

Requires MX-RB27 and either MX-RB13 or MX-FD10 if connecting to MX-FN21 or MX-FN22.

### 16. MX-FD10 Folding Unit

Folding options include Z, C, accordion, double and half folds.

Can only be installed with MX-FN21 or MX-FN22.

### 17. MX-RB13 Relay Unit (between 100-sheet finisher and inserter).

Required between 100 sheet staple finisher (MX-FN21 or MX-FN22) and MX-CF11.

### 18. MX-FN21 Finisher (4k - 100-sheet staple)

A3 - B5 (offset/staple), SRA3 - A5R (non offset).

Requires MX-RB27. Cannot be installed with MX-FN22.

### 19. MX-FN22 Saddle Stitch Finisher (4k - 100-sheet staple)

A4, A3, SRA3

Paper Weight: 60-105 g/m2 Cover >300 g/m2

Capacity: 1-20 sheets\* (stapled and folded).

Requires MX-RB27

### 20. MX-TM10 Trimming Module

Requires MX-FN22.

### 21. MX-PN13A/C/D Punch Module (for MX-FN21/FN22)

### 22. MX-FN34 Finisher (3k - 65-sheet staple)

A3 - B5 (offset/staple), SRA3 - A5R (non offset).

### 23. MX-FN35 Saddle Stitch Finisher (3k - 65-sheet staple)

A3 - B5 (offset/staple), SRA3 - A5R (non offset).

Paper Weight: 60-90 g/m2 Cover >256 g/m2

Capacity: 1-20 sheets\* (stapled and folded).

### 24. MX-PN16C/D Punch Module (for MX-FN34/FN35)

## Connectivity

### MX-AMX1 Application Integration Module

### MX-FR65U Data Security Kit

### MX-PF10 Barcode Font Kit

### AR-SU1 Stamp Unit

# Specifikationer

## GENERELT

|                                       |                     |
|---------------------------------------|---------------------|
| Hastighed - sider pr. minut (A4)      | 80                  |
| Hastighed - s/h sider pr. minut (A4)  | 80                  |
| Hastighed - farvesider pr. minut (A3) | 37                  |
| Hastighed - s/h sider pr. minut (A3)  | 37                  |
| Papirstørrelse: min. - max.           | A5R - SRA3          |
| Papirvægt (g/m <sup>2</sup> )         | 55-300              |
| Papirkapacitet :Standard (ark)        | 3100                |
| Papirkapacitet :Max (ark)             | 8500                |
| Opvarmningstid (sek.)                 | 55                  |
| Hukommelse generelt (Gb)              | 6                   |
| Harddisk                              | STD                 |
| Harddisk kapacitet (GB)               | 1000                |
| Duplex                                | STD                 |
| Strømkrav                             | 220-240V, 50 / 60Hz |
| Strømforbrug (kW)                     | 3,84                |
| Mål ( B x D x H) (mm.)                | 845 x 844 x 1249    |
| Vægt (kg)                             | 209                 |

## DOKUMENTFREMFØRER

|                         |     |
|-------------------------|-----|
| Originalkapacitet (ark) | 300 |
|-------------------------|-----|

## DOKUMENTARKIVERING

|                                                          |                                                           |
|----------------------------------------------------------|-----------------------------------------------------------|
| Arkiveringskapacitet - hovedmappe / brugermapper (sider) | 35000                                                     |
| Arkiveringskapacitet - hurtigmappe (sider)               | 10000                                                     |
| Lagret jobs                                              | Copy, print, scan, fax transmission                       |
| Lagringsmappe                                            | Quick file folder, main folder, custom folder (max. 1000) |
| Konfidentiel lagring                                     | •                                                         |

## FAX

|                             |                            |
|-----------------------------|----------------------------|
| Fax (standard / tilbehør)   | OPT                        |
| Kompressionsmetode          | MH / MR / MMR / JBIG       |
| Kommunikationsprotokol      | Super G3 / G3              |
| Overførselshastighed (sek.) | Less than 3                |
| Modemhastighed (bps)        | 33,600 - 22,400            |
| Overførselsopløsning (sek.) | 203.2 x 97.8 / 406.4 x 391 |
| Dokument størrelse (min.)   | A5R                        |
| Dokument størrelse (max.)   | A3                         |
| Hukommelse (Mb)             | 1024                       |
| Gråtone niveau              | 256                        |

## TRÅDLØST NETVÆRK

|                                        |                                                                     |
|----------------------------------------|---------------------------------------------------------------------|
| Trådløst netværk (standard / tilbehør) | STD                                                                 |
| Gældende regelsæt                      | IEEE802.11n / g / b                                                 |
| Adgangstilstand                        | Infrastructure mode, Software AP mode                               |
| Sikkerhed                              | WEP, WPA / WPA2-mixed PSK, WPA / WPA2-mixed EAP, WPA2 PSK, WPA2 EAP |

## KOPIMASKINE

|                                      |                                    |
|--------------------------------------|------------------------------------|
| Originalstørrelse (Max.)             | A3                                 |
| 1. farvekopi (sek.)                  | 5,6                                |
| 1. s/h kopi (sek.)                   | 4,0                                |
| Kontinuerlig kopiering (max. kopier) | 9999                               |
| Scanneropløsning ved s/h (dpi)       | 600 x 600, 600 x 400               |
| Scanneropløsning ved farve (dpi)     | 600 x 600                          |
| Printeropløsning                     | 1200 x 1200, 600 x 600, 9600 x 600 |
| Gradueringer - farve                 | 256                                |
| Zoomområde (%)                       | 25-400                             |
| Faste zoom-satser                    | 10 (5R / 5E)                       |

## SCANNER

|                                            |                                                                                                                                                               |
|--------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Netværksscanner (standard / tilbehør)      | STD                                                                                                                                                           |
| Scanningsmetode - "push" eller "pull" scan | •                                                                                                                                                             |
| Scanneropløsning - "push" scan (dpi)       | 100, 150, 200, 300, 400, 600                                                                                                                                  |
| Scanneropløsning - "pull" scan (dpi)       | 100, 150, 200, 300, 400, 600, 50-9600                                                                                                                         |
| Fil formater                               | TIFF, PDF, PDF / A-1, PDF / A-1b, encrypted PDF, XPS, compact PDF, JPEG, XPS, searchable PDF, Office Open XML, (pptx, xlsx, docx), txt (TXT), rich text (RTF) |
| Scannerdestinationer desktop               | •                                                                                                                                                             |
| Scannerdestinationer FTP, E-mail           | •                                                                                                                                                             |
| Scannerdestinationer netværksmappe         | •                                                                                                                                                             |
| Scannerdestinationer USB hukommelse        | •                                                                                                                                                             |

## PRINTER

|                                           |                                                                                                                 |
|-------------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| Opløsning (dpi)                           | 1200 x 1200, 600 x 600, 9,600 (equivalent) x 600                                                                |
| Interface Standard / Tilbehør             | Std USB 2.0, 10Base-T / 100Base-TX-1000Base-T                                                                   |
| Understøttede operativsystemer (standard) | Windows 8.1, 10, Windows Server 2012, 2012R2, 2016, 2019, Mac OS 10.9, 10.10, 10.11, 10.12, 10.13, 10.14, 10.15 |
| Netværksprotokoller                       | TCP / IP                                                                                                        |
| Printerprotokoller                        | LPR, Raw TCP (port 9100), POP3 (e-mail printing), HTTP, FTP for downloading print files, IPP, SMB, WSD          |
| PDL standard / tilbehør                   | Std PCL6, Genuine Adobe PS3                                                                                     |
| Tilgængelig fonte                         | 80 (PCL), 139(P3)                                                                                               |

## EFTERBEHANDLING

|                             |      |
|-----------------------------|------|
| Kapacitet Max.              | 4250 |
| Hæfte kapacitet (sider) max | 100  |
| Falsning (folde-funktion)   | OPT  |
| Off-set forskydning         | STD  |
| Hulle funktion              | OPT  |

## TONER INDHOLD

|                                 |       |
|---------------------------------|-------|
| Sort (sider med 5% dækflade)    | 70000 |
| Cyan (sider med 5% dækflade)    | 50000 |
| Magenta (sider med 5% dækflade) | 50000 |
| Yellow (sider med 5% dækflade)  | 50000 |



Design and specifications are subject to change without prior notice. Fiery is a registered trademark of Electronics for Imaging, Inc. in the US and/or certain other countries. Microsoft, Windows Server, and Windows are either registered trademarks or trademarks of Microsoft Corporation in the US and/or other countries. Gmail is a trademark of Google LLC. Mac is a trademark of Apple Inc., registered in the US and other countries. PCL is a registered trademark of Hewlett-Packard Company. Adobe and PostScript 3 are either registered trademarks or trademarks of Adobe in the US and/or other countries. Intel and Pentium are trademarks of Intel Corporation or its subsidiaries in the US and/or other countries. Qualcomm DirectOffice is a product of Qualcomm Technologies, Inc. and/or its subsidiaries. Qualcomm is a trademark of Qualcomm Incorporated, registered in the US and other countries. DirectOffice is a trademark of CSR Imaging US, LP, registered in the US and other countries. All other brand names and product names may be trademarks or registered trademarks of their respective owners. ©Sharp Corporation September 2020. Ref: MX-8081 Datasheet. All trademarks acknowledged. E&OE.